

NEW DRAWER HEATER

Concerns:

Built-in 55cm oven with warmer drawer from Schwanden production 1997 - 2010 up to and including serial no. 0 25

Problem:

Plates do not get warm enough / does not heat up enough.

Reason:

Large temperature fluctuation of warmer drawer due to slow regulation by the temperature switch. temperature switch

Factory measure:

- From serial no. 0 26 old warmer drawer 400V-480W, ET-Nr. 387 13 22-01 / 6 replaced by the new warmer drawer 400V-350W, ET-Nr. 5610855289 (inc. service information. Warmer identical in construction to the previous 480W version. Distinguishing feature: 480W with RED ceramic bead, new 350W with ORANGE bead).
- 55°C temperature switch no longer necessary.

Customer service measure:



Modify units up to and including serial no. 0 26 as follows:

- Exchange warmer drawer (new 350W)
- Remove 55°C temperature switch.
- Remove the wire between the temperature switch and warmer drawer. (*)
- Error code 118 / 28

Recommendation to the customer:

When loading with stack of 4 plates:
→ Warming time 30 - 35 mins.

When loading with stack of more than 4 plates:
→ After warming time of 30 – 35 mins. swap the plates around and warm for a further 10 – 15 mins.

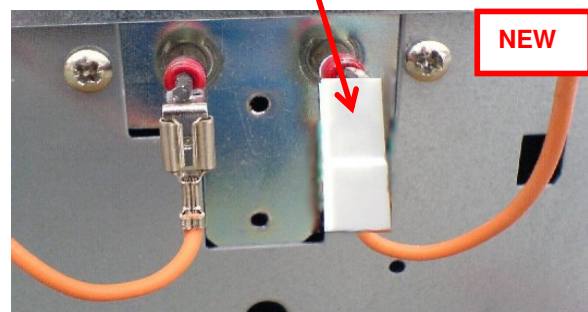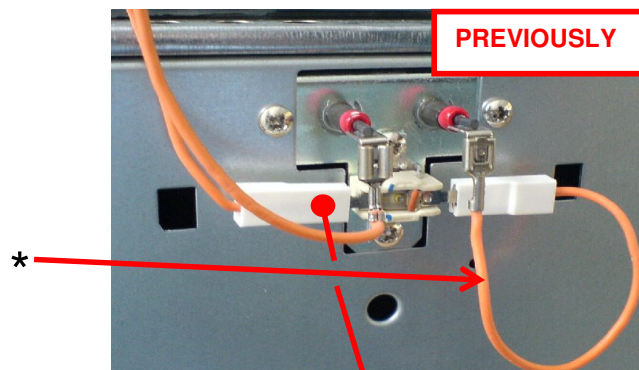

PNC affected

PNC	DATE	MODEL	BRAND
944270983	2010-06-28	EBSL7WE	Electrolux
944270984	2010-06-28	EBSL7SP	Electrolux
944270985	2010-06-28	EBSL7CN	Electrolux
944271079	2010-06-28	EBSL7EEV	Electrolux
944271000	2010-06-28	EBVSL6WE	Electrolux
944271001	2010-06-28	EBVSL6SP	Electrolux
944271002	2010-06-28	EBSL6WE	Electrolux
944271003	2010-06-28	EBSL6SP	Electrolux
944271004	2010-06-28	EBSL6CN	Electrolux
944271010	2010-06-28	EBVGL5XWE	Electrolux
944271011	2010-06-28	EBVGL5XSP	Electrolux
944271012	2010-06-28	EBVGL5XCN	Electrolux
944271013	2010-06-28	EBGL5XWE	Electrolux
944271014	2010-06-28	EBGL5XSP	Electrolux
944271015	2010-06-28	EBGL5XCN	Electrolux
948533321	2010-06-28	EHSL6-4WE	Electrolux
948533322	2010-06-28	EHSL6-4SP	Electrolux
948533323	2010-06-28	EHSL6-4CN	Electrolux
948533324	2010-06-28	EHGL5X-4WE	Electrolux
948533325	2010-06-28	EHGL5X-4SP	Electrolux
948533326	2010-06-28	EHGL5X-4CN	Electrolux
948533376	2010-06-28	EHELEGA07	Tiba

REVISION:

Revision	Date	Description
00	06/2010	First issue