


Einzellitzen / single wires

Pos	Kontaktfolge / contact	Auflösung / structure explanation	min.	colour	no
1	BR16 - BR19	175 - 260 - 175	0,75	bl	.04
2	BR20 - X1/2	175 - 460 - 175	0,75	gr	.07
3	BR13 - r34/2 - r33/2	175 - 330 - 195 - 500 - 194	1,5 - 0,75	br - sw	.11
4	BR14 - r31/2 - r32/2	175 - 500 - 195 - 360 - 194	1,5 - 0,75	rt - ws	.17
5	PE/Mulde - X1/PE	182 - 350 - 175	1,5	gng	.24

Steuerleitung / control line (separate Lieferung)

Kontaktfolge / contact	Sachnummer / article number code
powerboard - userinterface	330 473 600

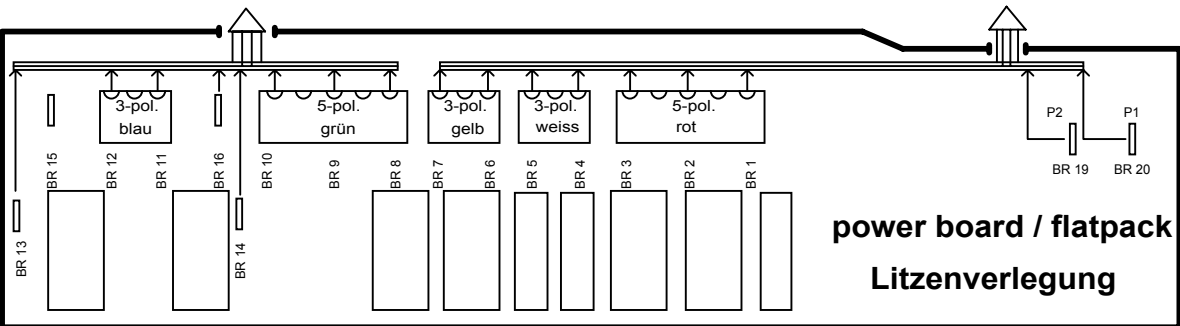

Bezeichnung	designation	Elux Sachnummer	Elux part no
Liste Anschlagteile	list of crimp contacts	330 1766 00	
Betriebsmittelliste	list of components	330 2222 00	
Liste Einzellitzen	list of single wires	374 3982 00	
Anschlussbezeichnungen	Port identification	330 6406 00	

B		Exchange r31/4 - 4a, BR13-r34/2 : 330mm		P.Zweifel	SC8943	13.02.04
1	A	First Edition		P.Zweifel		7.10.03
POS	ZUST	MODIFICATIONS		SIGNATURE	REQUEST	DATE
MATERIAL			Leitungsmaterial in silikon Temp. best. man 180°C Insulation of the cord is silicon, temperature-resistance: min 180°C		MODEL	SCALE
TREATMENT			WEIGHT		DESIGN	USERS
DESIGN			OWNER	DRN	CHD	DATE
SC			P.Zweifel	APPR		7.10.03
TITLE				wiring hob cpl.		
NUMBER				374 3960 02		
SHEET				01(01)		
REV				B		



374 3960 02	---	SC	wiring hob indep.400V, 2x2 Krs, 2x1 Krs HIC 60 Compact
Variant Number	Model	Design Users	Changes from the Base number