This drawing contains confidential information and is the exclusive property of Electrolux and it may not be copied, shown or handed to a third party without written permission to be returned promptly upon request. Unauthorized use will be prosecuted for the drawing.

Items shown in this drawing must not contain substances that exceed the limits established by 2002/95/EC RoHS Directive (Lead, Cadmium, Mercury, hexavalent Chromium, PBB and PBDE), or substances classified as "Banned" or "Restricted" according to the Electrolux Restricted Materials List.

SAFETY RISKS

GENERAL TOLERANCES
ANGLES
LENGTHS AND DIAMETERS

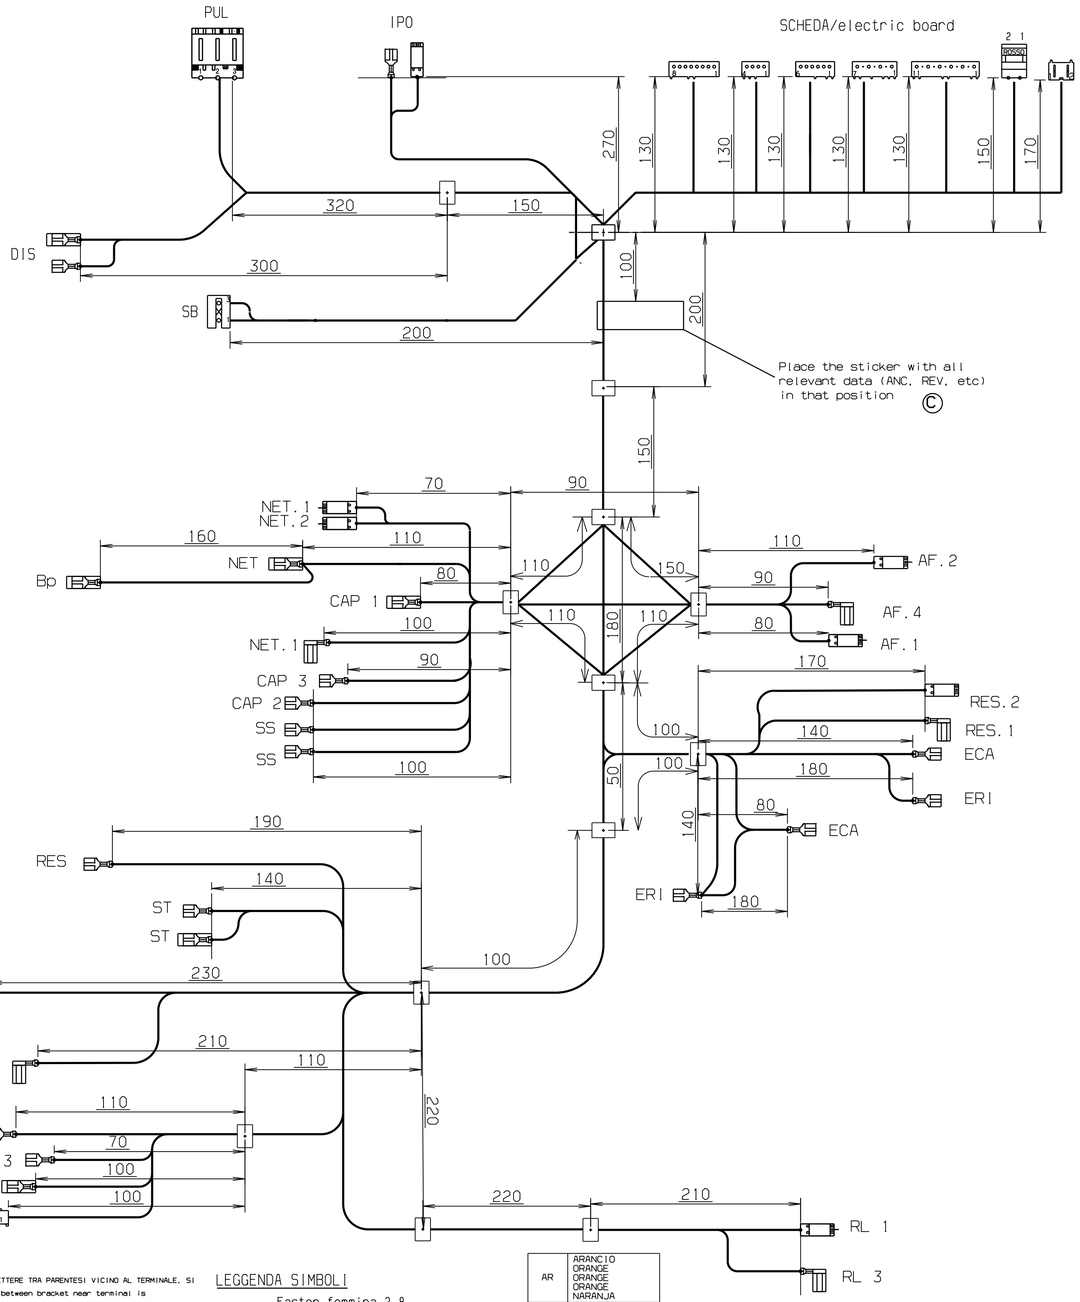

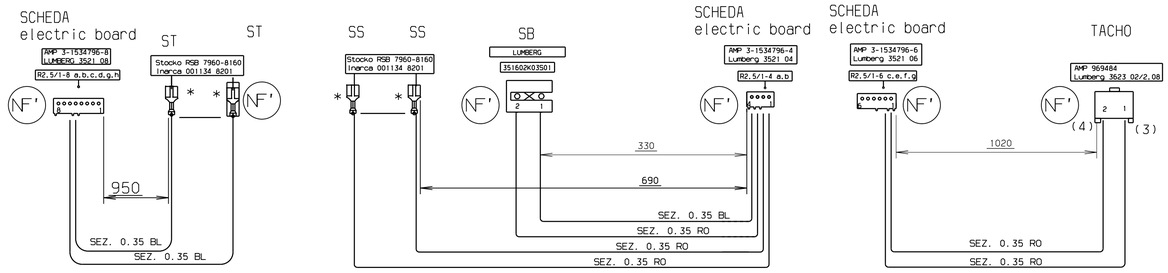

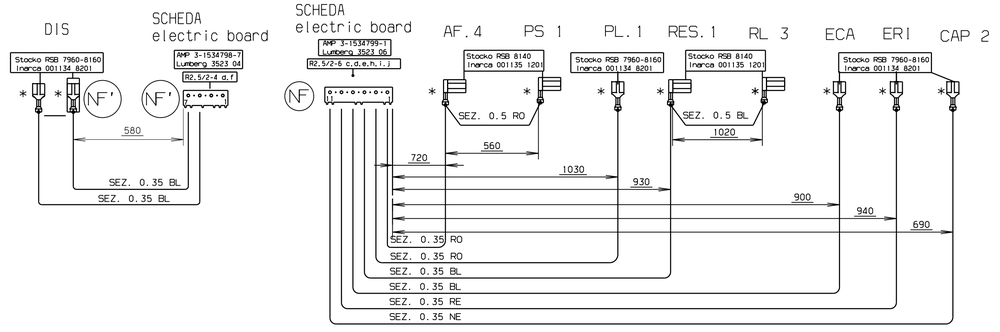

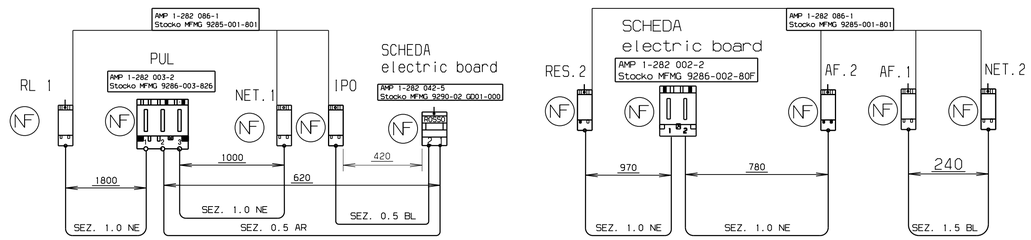

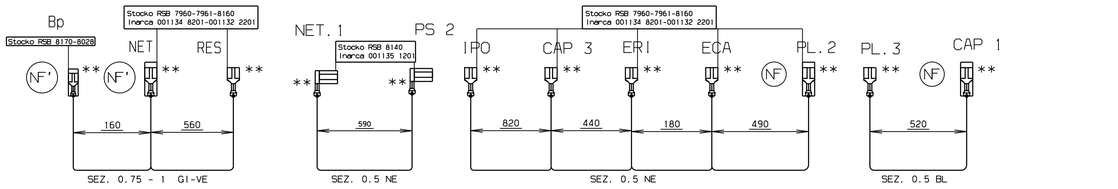

IL NUMERO O LE LETTERE TRA PARENTESI VICINO AL TERMINALE, SI
Number or letter between bracket near terminal is
RIFERISCONO ALLA MARCHIATURA DA PREVEDERE SUL CAVO
Refered to needed mark on wiring

LUNGHEZZA CAVETTI ESPRESSA IN MILLIMETRI CON TOLLERANZA
Wire lenght displayed in millimeter with cut
DI TAGLIO : +15-0
tollerance : +15-0

WIRE CHARACTERISTICS:
MATERIAL -- CABLE min H03-V2-K 70-90 °C

LEGGENDA SIMBOLI

- Faston femmina 2.8 / Female Faston 2.8
- Faston femmina 6.3 / Female faston 6.3
- Faston occhiello / Eye faston
- Faston femmina con coprifaston / Female Faston with Protection
  - Faston bandiera ANTISFILAMENTO / Antislipping flag Faston
- Faston maschio/femmina / Standard Pg-back Faston
- Contatto timer per connettore / Connector's timer contact
  - Faston femmina antisfilamento / Antislipping female Faston
  - Faston femmina antisfilamento / Antislipping female Faston / Con coprifaston / With protection

AR	ARANCIO / ORANGE / ORANGE / ORANGE / NARANJA
BI	BIANCO / WHITE / WEISS / BLANC / BLANCO
BL	BLU / BLUE / BLAU / BLEU / AZUL
CE	CELESTE / LIGHT BLUE / HELL BLAU / BLEU CLAIR / AZUL CLARO
GI-VE	GIALLO-VERDE / YELLOW-GREEN / GELB-GRUN / JAUNE-VERT / AMARILLO-VERDE
MA	MARRONE / BROWN / BRAUN / MARRON / MARRON
NE	NERO / BLACK / SCHWARZ / NOIR / NEGRO
RO	ROSSO / RED
VI	VIOLA / PURPLE / VIOLETT / VIOLET / VIOLETA

NOTA

IL CABLAGGIO DEVE ESSERE FORNITO COME DA PRESCRIZIONE
Harness must be supplied due to prescription
CD. 152.279.50/ (IMBALLAGGIO CON NASTRO IN CARTA)

LEGEND:
* - Brass tin plated
** - Brass with or without tin plated
(NF') Insulation housing, Glow-wire 650°C without flame according IEC 60335-1 Clause 30
(NF) Insulation housing, Glow-wire 750°C without flame according IEC 60335-1 Clause 30
Keying rib
Eliminated keying rib

POS	MODIFICATIONS	SIGNATURE	REQUEST	DATE
C	Info about sticker position added	Sowicz		10/01/07
B	Increased section of the wires AF.4-PS. RES.1-RL 3	Sowicz		17/07/06
A	FIRST EMMISION	Sowicz		29/06/06

MATERIAL		DESIGN USERS: PLV	SCALE
TREATMENT	WEIGHT		REPLACES
DESIGN OWNER	DRN Sowicz	CHD	DERIVED FROM
	DATE 29/06/06	APPR	SUPPLY SPECIFICATIONS CSS2091

2D ONLY / CONCEPT 3D / EXACT 3D

MODEL EDW 1500 MIDI

TITLE CABLAGGIO ASSIEMATO DIVA
Diva Wire Harness

NUMBER 156.015.0 REV C SHEET

VARIANT NUMBER	MODEL	DESIGN USERS	CHANGINGS FROM THE BASIC NUMBER
156.015.00/0	Base Main	PLV	Particolare rappresentato a disegno Variant number shown in the drawing

Electrolux

A1 [DF02]