This drawing contains confidential information and is the property of Electrolux and must not be copied, shown or handed to a third party or otherwise used without our express permission. Otherwise it is to be returned promptly upon request to the design owner, who is responsible for the drawing.

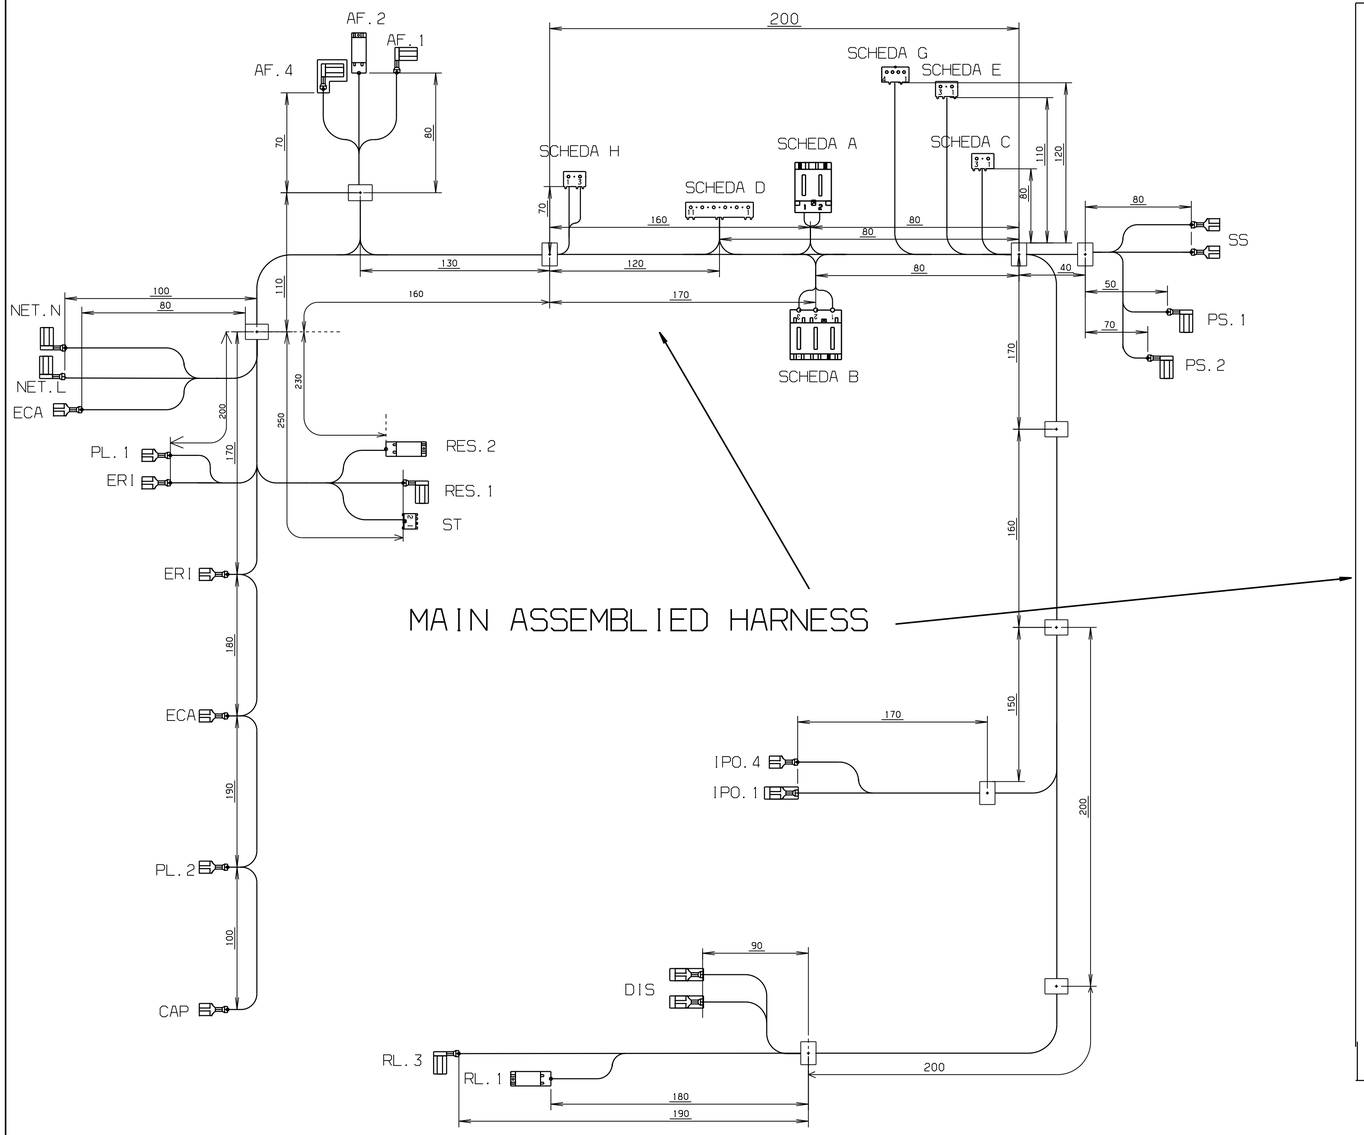

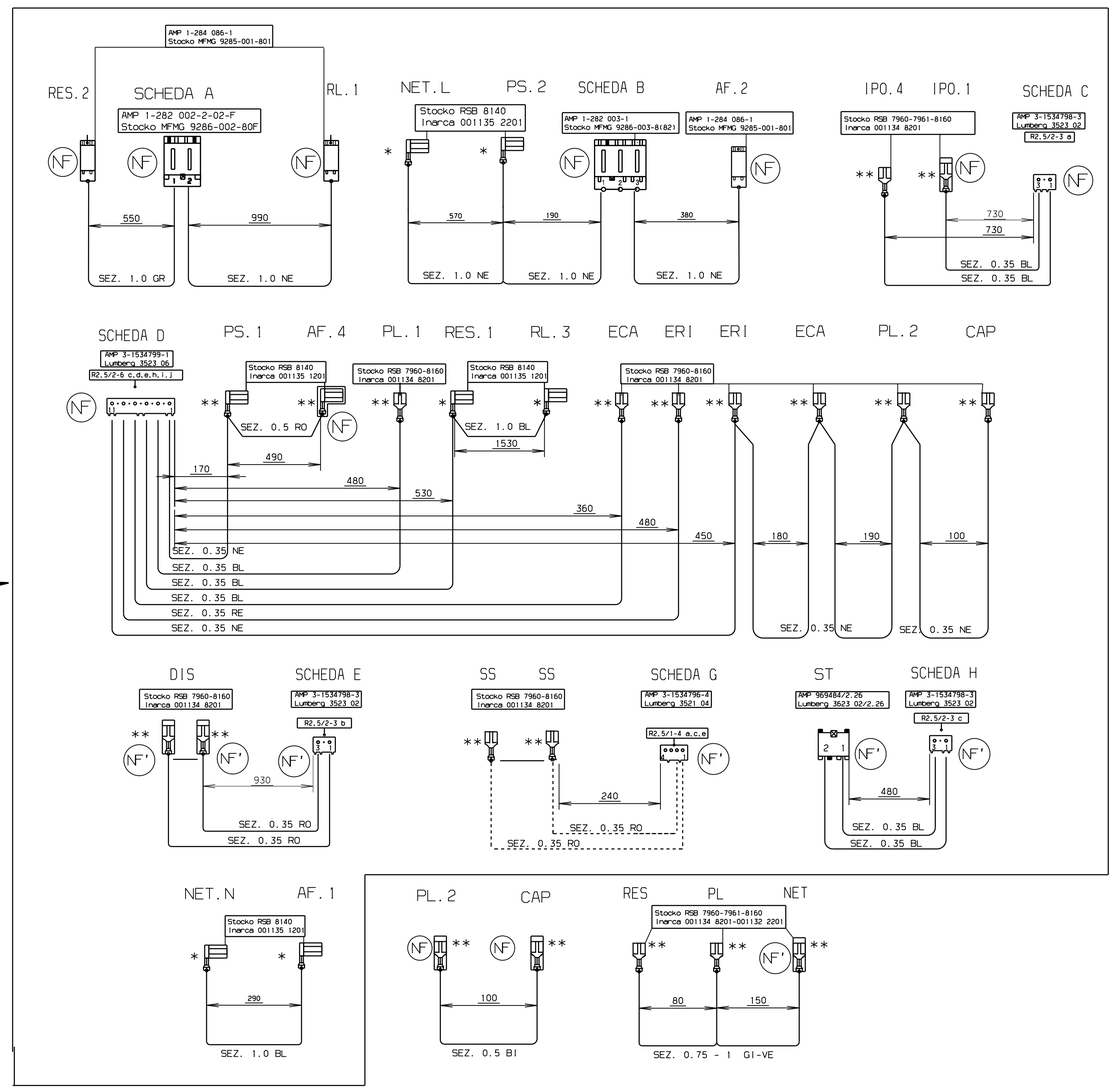

IL NUMERO O LE LETTERE TRA PARENTESI VICINO AL TERMINALE, SI
Number or letter between bracket near terminal is
RIFERISCONO ALLA MARCHIATURA DA PREVEDERE SUL CAVO
Refered to needed mark on wiring

LUNGHEZZA CAVETTI ESPRESSA IN MILLIMETRI CON TOLLERANZA
Wire lenght displayed in millimeter with cut
DI TAGLIO : +15-0
tollerance : +15-0

WIRE CHARACTERISTICS:
MATERIAL -- CABLE min H03-V2-K 70-90 °C

LEGGENDA SIMBOLI

- Faston femmina 2.8 / Female Faston 2.8
- Faston femmina 6.3 / Female faston 6.3
- Faston occhiello / Eye faston
- Faston femmina con coprifaston / Female Faston with Protection
- Faston bandiera ANTISFILAMENTO / Antislipping flag Faston
- Faston maschio/femmina / Standard Pg-back Faston
- Contatto timer per connettore / Connector's timer contact
- Faston femmina antisfilamento / Antislipping female Faston
- Faston femmina antisfilamento / Antislipping female Faston / Con coprifaston / With protection

NOTA

IL CABLAGGIO DEVE ESSERE FORNITO COME DA PRESCRIZIONE
Harness must be supplied due to prescription
CD. 152.279.50/ (IMBALLAGGIO CON NASTRO IN CARTA)

AR	ARANCIO / ORANGE / ORANGE / ORANGE / NARANJA
BI	BIANCO / WHITE / WEISS / BLANC / BLANCO
BL	BLU / BLUE / BLAU / BLEU / AZUL
CE	CELESTE / LIGHT BLUE / HELL BLAU / BLEU CLAIR / AZUL CLARO
GI-VE	GIALLO-VERDE / YELLOW-GREEN / GELB-GRUN / JAUNE-VERT / AMARILLO-VERDE
MA	MARRONE / BROWN / BRAUN / MARRON / MARRON
NE	NERO / BLACK / SCHWARZ / NOIR / NEGRO
RO	ROSSO / RED
VI	VIOLA / PURPLE / VIOLETT / VIOLET / VIOLETA
GR	GRIGIO / GREY

INFO:

The variant codes are made by three separated harness. The main assemblied one plus two wires (PL.2-CAP and RES-PL-NET.
All of them have to be inserted in to the same plastic bag.

LEGEND:
* - Brass tin plated
** - Brass with or without tin plated
(NF') Insulation housing, Glow-wire 650°C without flame according IEC 60335-1 Clause 30
(NF) Insulation housing, Glow-wire 750°C without flame according IEC 60335-1 Clause 30
Keying rib
Eliminated keying rib

VARIANT NUMBER	MODEL	DESIGN USERS	CHANGINGS FROM THE BASIC NUMBER
156.016.61/1	S/ SS Without SS	PLV	Eliminare cavi SCHEDA / SB Do not process wires SCHEDA / SB
156.016.60/1	Base Main	PLV	Particolare rappresentato a disegno Variant number shown in the drawing

POS	MODIFICATIONS	SIGNATURE	REQUEST	DATE
C	New layout of the wires to NET.L and AF.2	Sowicz		02/11/06
B	Section of the wire NET.L-PS.2 increased from 0.5 to 1.0	Sowicz		19/09/06
A	FIRST EMMISION	Sowicz		31/07/06

MATERIAL
TREATMENT
WEIGHT
DESIGN USERS: PLV
SCALE
REPLACES
EUROPEAN METHOD
MODEL: EDW 503 CD
DERIVED FROM
SUPPLY SPECIFICATIONS: CSS2091
DESIGN OWNER: DRN Sowicz, CHD, DATE 31/07/06, APPR
2D ONLY / CONCEPT 3D / EXACT 3D
TITLE: CABLAGGIO ASSIEMATO DIVA
Diva Wire Harness
Electrolux
NUMBER 156.016.6
REV C
SHEET

Items shown in this drawing must not contain substances listed under environmental legislation 2002/95/EC The RoHS Directive (Lead, Cadmium, Mercury, hexavalent Chromium, PBB and PBDE), or substances classified as "Banned" or "Restricted" according to the Electrolux Restricted Materials List.

SAFETY RISKS

GENERAL TOLERANCES
ANGLES
LENGTHS AND DIAMETERS

A1 [DF02]