This drawing contains confidential information and is the property of Electrolux, without whose permission it may not be copied, shown or handed to a third party or otherwise used and it is to be returned promptly upon request to the design owner, who is responsible for the drawing.

Items shown in this drawing must not contain substances that are banned according to Directive 2002/95/EC, the RoHS Directive (Lead, Cadmium, Mercury, hexavalent Chromium, PBB and PBDE), or substances classified as "Banned" or "Restricted" according to the Electrolux Restricted Materials List.

SAFETY RISKS

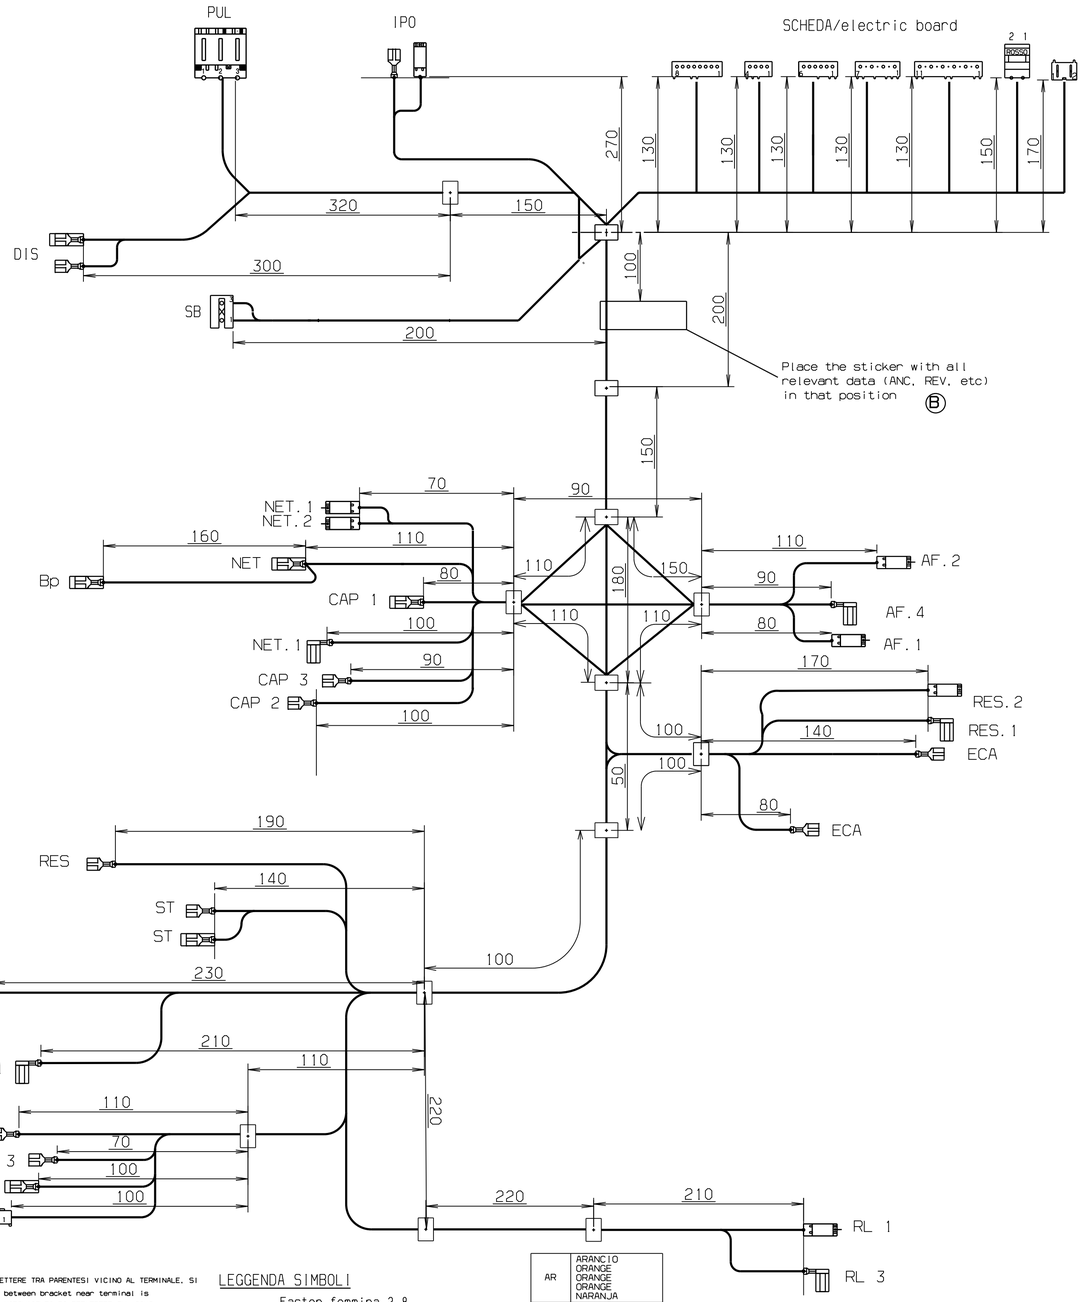

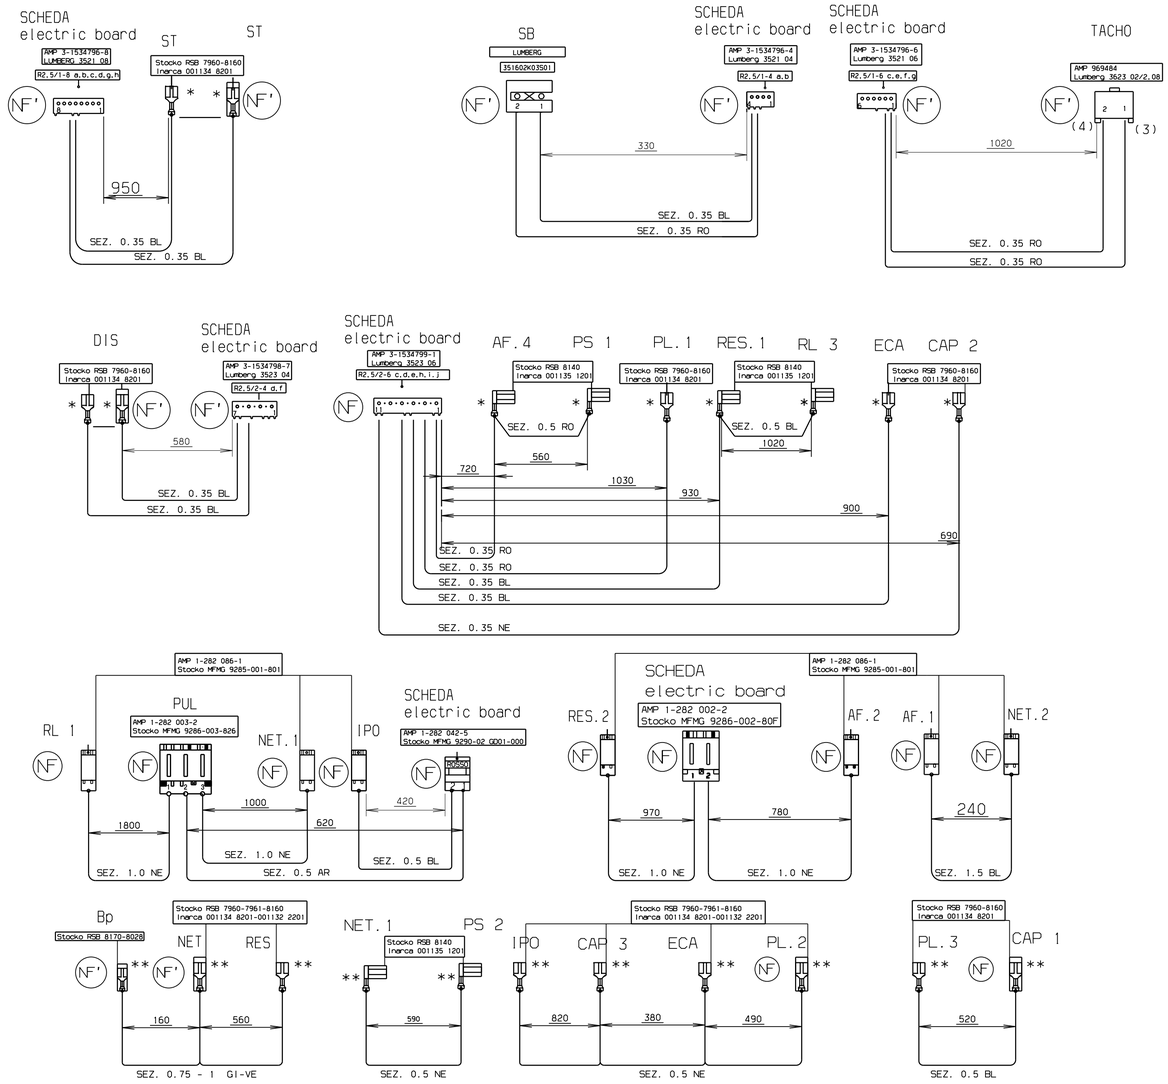

IL NUMERO O LE LETTERE TRA PARENTESI VICINO AL TERMINALE, SI
Number or letter between bracket near terminal is
RIFERISCONO ALLA MARCHIATURA DA PREVEDERE SUL CAVO
Refered to needed mark on wiring

LUNGHEZZA CAVETTI ESPRESSA IN MILLIMETRI CON TOLLERANZA
Wire lenght displayed in millimeter with cut
DI TAGLIO : +15-0
tollerance : +15-0

WIRE CHARACTERISTICS:
MATERIAL -- CABLE min H03-V2-K 70-90 °C

LEGGENDA SIMBOLI

- Faston femmina 2.8 / Female Faston 2.8
- Faston femmina 6.3 / Female faston 6.3
- Faston occhiello / Eye faston
- Faston femmina con coprifaston / Female Faston with Protection
- Faston bandiera ANTISFILAMENTO / Antislipping flag Faston
- Faston maschio/femmina / Standard Pg-back Faston
- Contatto timer per connettore / Connector's timer contact
- Faston femmina antisfilamento / Antislipping female Faston
- Faston femmina antisfilamento / Antislipping female Faston / Con coprifaston / With protection

NOTA

IL CABLAGGIO DEVE ESSERE FORNITO COME DA PRESCRIZIONE
Harness must be supplied due to prescription
CD. 152.279.50/ (IMBALLAGGIO CON NASTRO IN CARTA)

AR	ARANCIO ORANGE ORANGE ORANGE NARANJA
BI	BIANCO WHITE WEISS BLANC BLANCO
BL	BLU BLUE BLAU BLEU AZUL
CE	CELESTE LIGHT BLUE HELL BLAU BLEU CLAIR AZUL CLARO
GI-VE	GIALLO-VERDE YELLOW-GREEN GELB-GRUN JAUNE-VERT AMARILLO-VERDE
MA	MARRONE BROWN BRAUN MARRON MARRON
NE	NERO BLACK SCHWARZ NOIR NEGRO
RO	ROSSO RED
VI	VIOLA PURPLE VIOLETT VIOLET VIOLETA

LEGEND:
* - Brass tin plated
** - Brass with or without tin plated

NF' Insulation housing, Glow-wire 650'C without flame according IEC 60335-1 Clause 30

NF Insulation housing, Glow-wire 750'C without flame according IEC 60335-1 Clause 30

Keying rib

Eliminated keying rib

POS	MODIFICATIONS	SIGNATURE	REQUEST	DATE
B	Info about sticker position added	Sowicz		10/01/07
A	FIRST EMMISION	Sowicz		20/09/06

MATERIAL		DESIGN USERS PLV	SCALE
TREATMENT	WEIGHT		REPLACES
DESIGN OWNER	DRN Sowicz	CHD	2D ONLY / CONCEPT 3D / EXACT 3D
	DATE 20/09/06	APPR	
MODEL MIDI EDW1500 AUSTRALIA			DERIVED FROM
			SUPPLY SPECIFICATIONS CSS2091

EUROPEAN METHOD

TITLE CABLAGGIO ASSIEMATO DIVA
Diva Wire Harness

NUMBER 156.021.5 REV B SHEET

VARIANT NUMBER	MODEL	DESIGN USERS	CHANGINGS FROM THE BASIC NUMBER
156.021.50/0	Base Main	PLV	Particolare rappresentato a disegno Variant number shown in the drawing

Electrolux

GENERAL TOLERANCES
ANGLES
LENGTHS AND DIAMETERS

A1 [DF02]