

This drawing contains confidential information and is the property of Electrolux. It may not be copied, shown or used in any way without the prior written consent of Electrolux. It is to be returned promptly upon request. The user is responsible for the drawing.

[2] Critical dimensions which must be under capability

SAFETY REQUIREMENT

Visible surfaces.  
Draft angles (not shown):

THEORETICAL FLAT AREA

DEVELOPED FLAT AREA



GENERAL TOLERANCES

ANGLES

LENGTHS AND DIAMETERS

A2


RR has the effect  
700/1700W at 230V

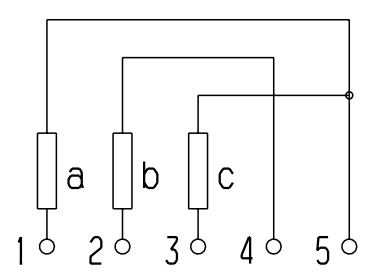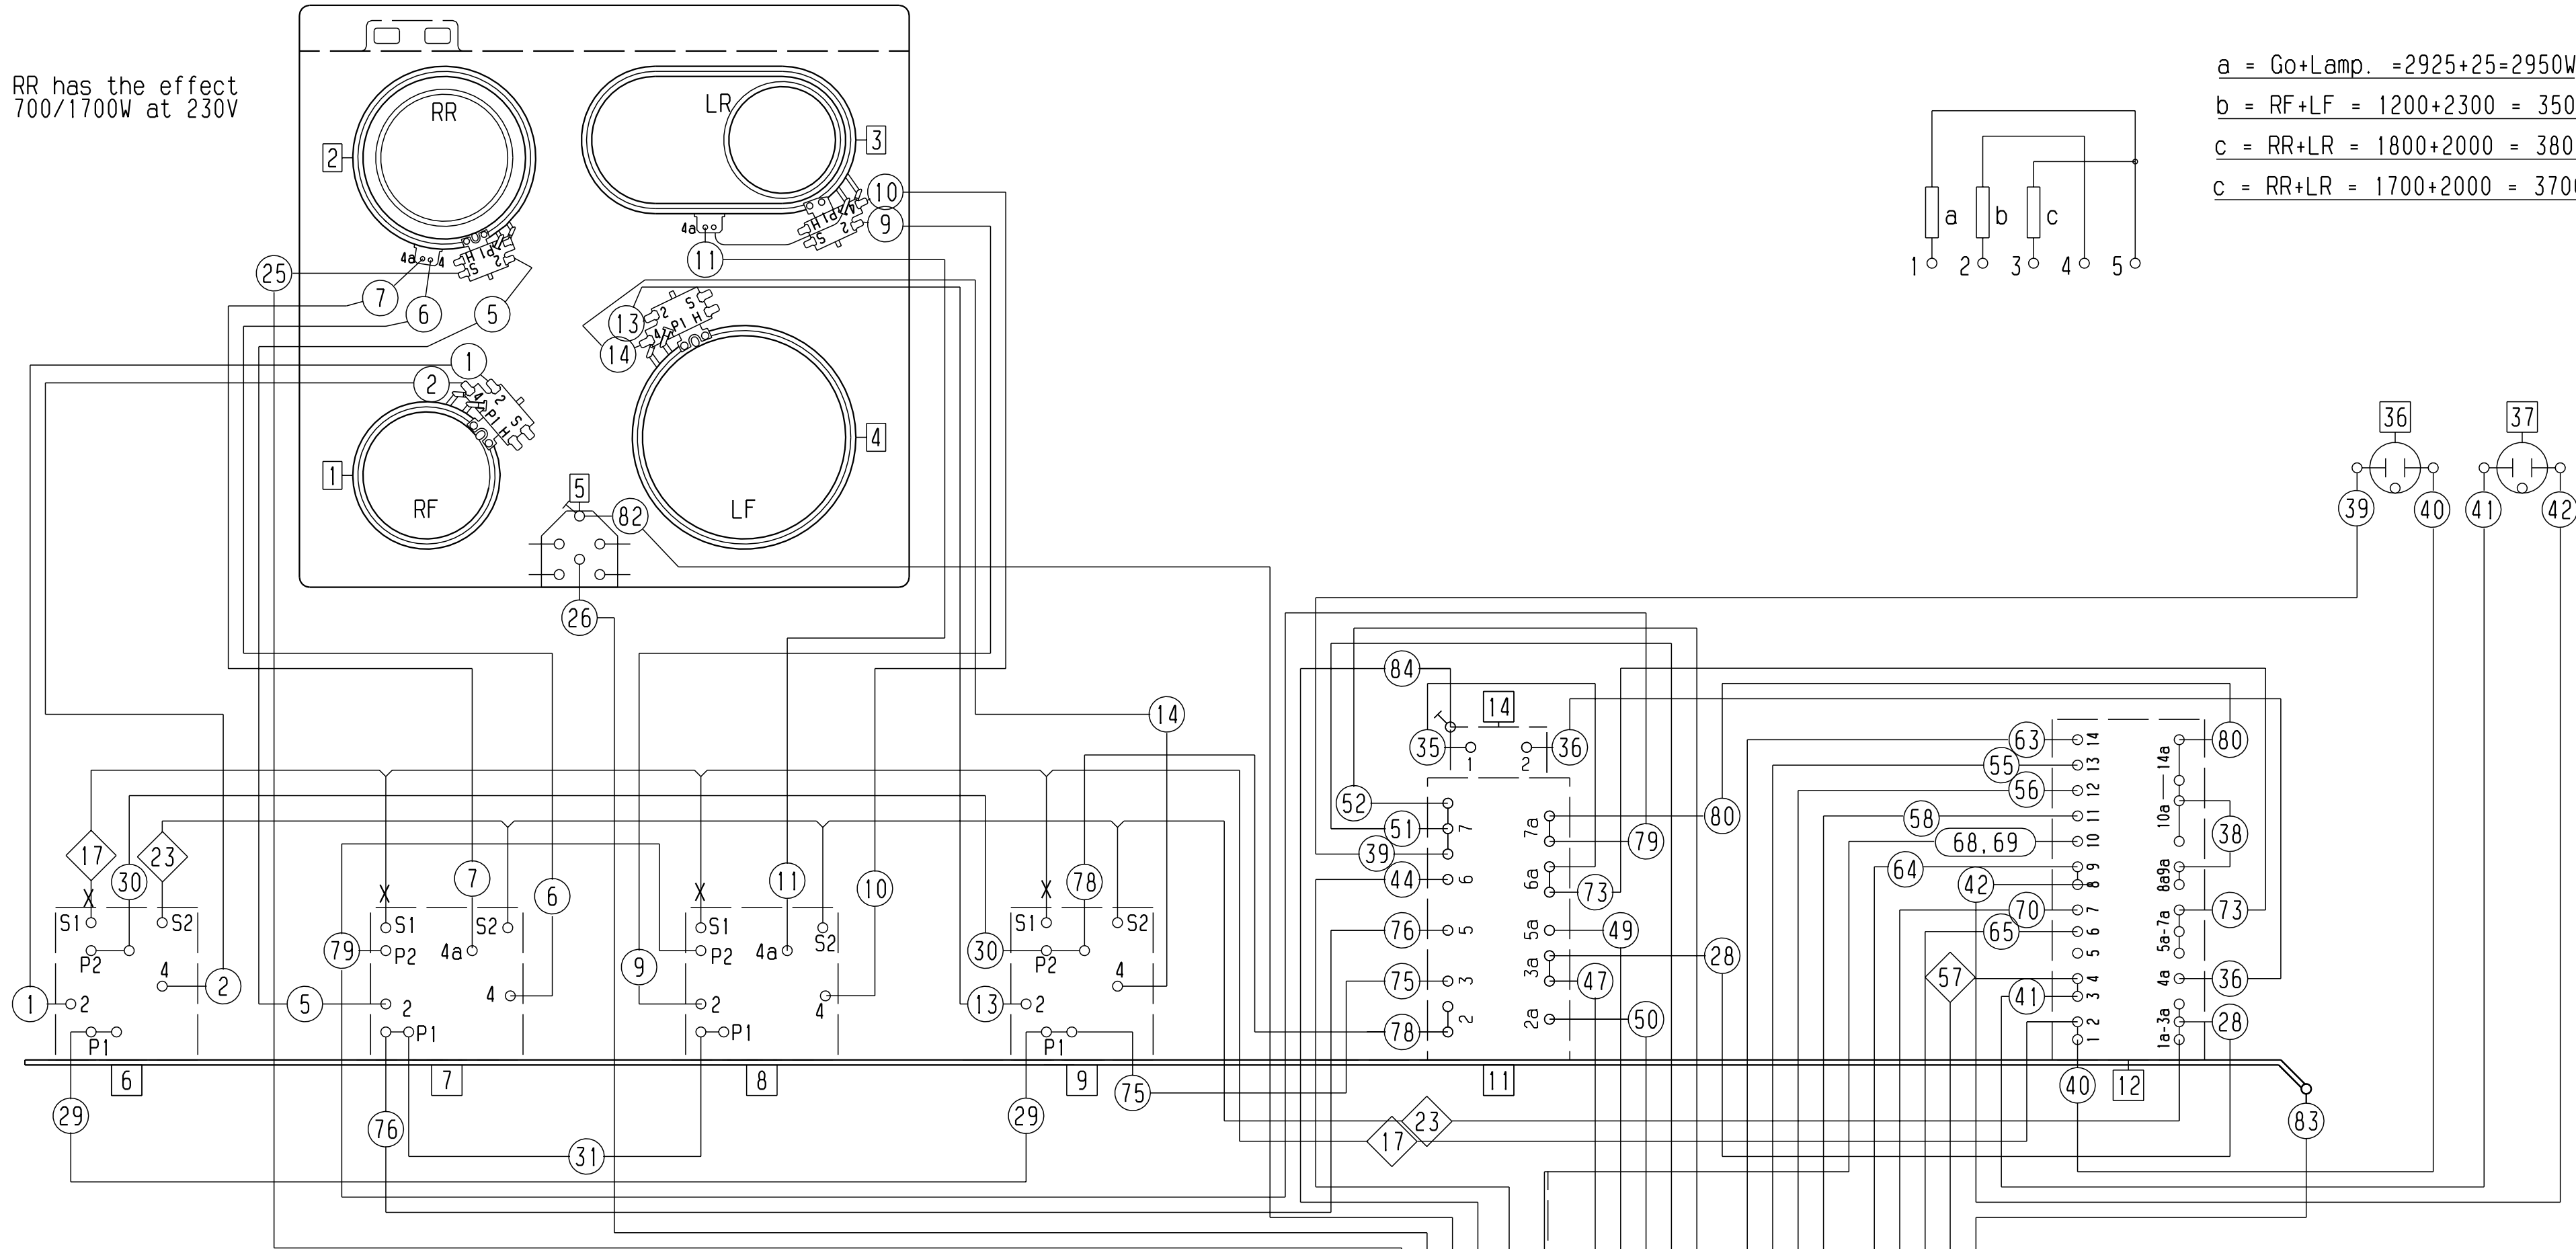

a = Go+Lamp. = 2925+25=2950W  
 b = RF+LF = 1200+2300 = 3500W  
 c = RR+LR = 1800+2000 = 3800W  
 c = RR+LR = 1700+2000 = 3700W

Components =

1	R1	Radiant Heater Ø140	1200W	24	-	-
2	R2	" Ø120/180	900/1800W, 700/1700W	25	-	-
3	R3	" Ø140/250	1100/2000W	26	R13	Power resistor 2k7 17W
4	R4	Radiant heater Ø210	2300W	27	-	-
5	H4	Heat indicator	3051621	28	-	-
6	Q1	Energy regylator		29	-	-
7	Q2	Energy regulator (2-circuit)		30	-	-
8	Q3	Energy regulator (2-circuit)		31	R9	Element G.oven outer 1000W
9	Q4	Energy regulator		32	R10	" " grill 1900W
10	-	-		33	R11	Hot air heater 1350W
11	S1	Safety switch		34	M1	Hot air fan
12	Q5	Switch	oven	35	R12	Element G.oven lower 1000W
13	-	-		36	H1	Indicator lamp cooker
14	T1	Thermostat	oven	37	H2	Indicator lamp oven
15	-	-		38	-	-
16	E1	Oven lamp	15W Grilloven	39	-	-
17	-	-		40	-	-
18	-	-		41	-	-
19	-	-		42	-	-
20	-	-		43	-	-
21	-	-		44	-	-
22	-	-		45	-	-
23	-	-		46	X1	Terminal block

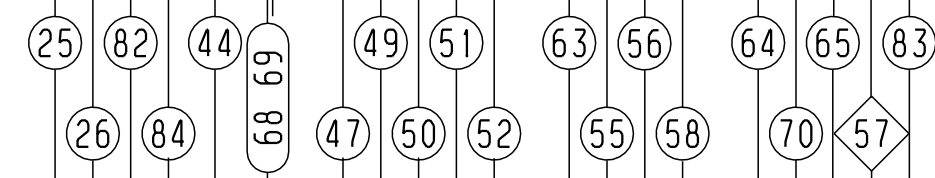

MATERIAL	-	MODEL	-	SCALE	-	EUROPEAN METHOD	
TREATMENT	-	DESIGN USERS	MO	REPLACES NO	-	DERIVED FROM NO	-
DESIGN OWNER	MO	DRN	IAN	CHD	-	DATE	990318
APPR	-	TITLE	Wiring diagram				
Electrolux			NUMBER	305 29 52 sh1		REV	A