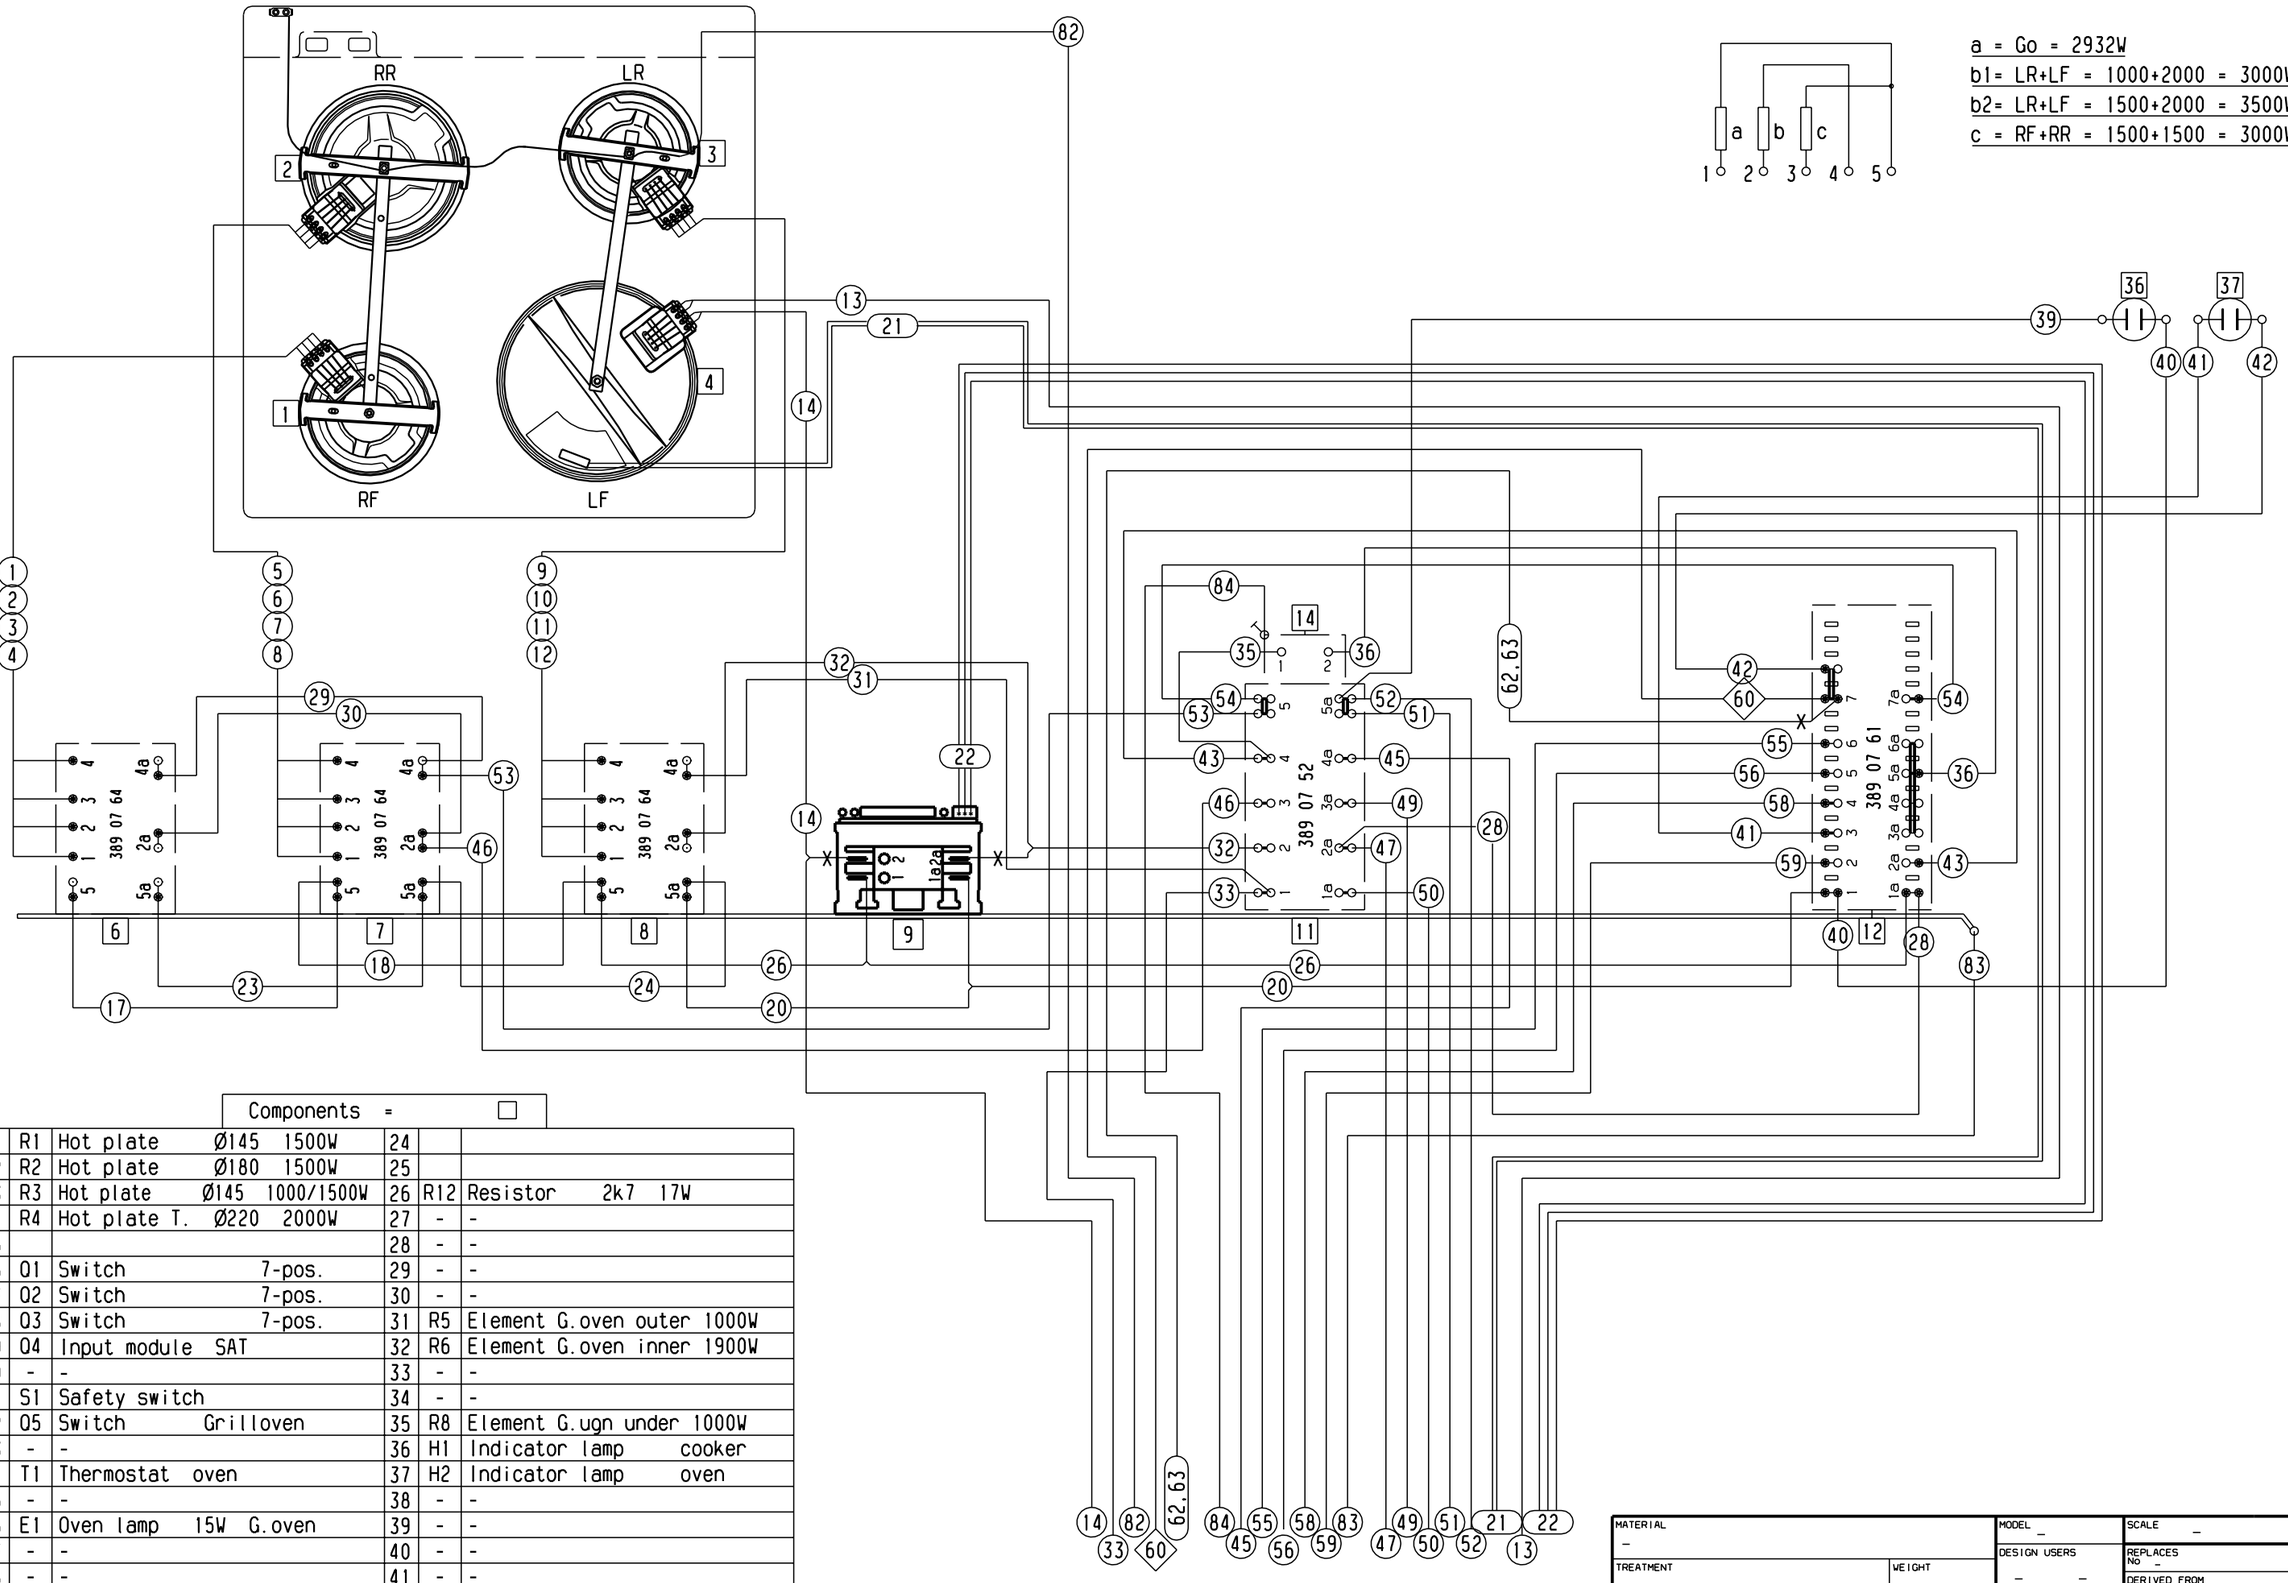

Components = □

1	R1	Hot plate Ø145 1500W	24		
2	R2	Hot plate Ø180 1500W	25		
3	R3	Hot plate Ø145 1000/1500W	26	R12	Resistor 2k7 17W
4	R4	Hot plate T. Ø220 2000W	27	-	-
5			28	-	-
6	Q1	Switch 7-pos.	29	-	-
7	Q2	Switch 7-pos.	30	-	-
8	Q3	Switch 7-pos.	31	R5	Element G.oven outer 1000W
9	Q4	Input module SAT	32	R6	Element G.oven inner 1900W
10	-	-	33	-	-
11	S1	Safety switch	34	-	-
12	Q5	Switch Grilloven	35	R8	Element G.ugn under 1000W
13	-	-	36	H1	Indicator lamp cooker
14	T1	Thermostat oven	37	H2	Indicator lamp oven
15	-	-	38	-	-
16	E1	Oven lamp 15W G.oven	39	-	-
17	-	-	40	-	-
18	-	-	41	-	-
19	-	-	42	A3	SAT-unit
20	-	-	43	-	-
21	T2	Bimetal thermostat	44	-	-
22	-	-	45	-	-
23	-	-	46	X1	Terminal block

This drawing contains confidential information and is the property of ..... without whose permission it may not be copied, shown or handed to a third party or otherwise used, and it is to be returned promptly upon request to the ..... which is responsible for the drawing.

[2] Critical dimensions which must be under capability

SAFETY REQUIREMENT

— — — Visible surfaces.
Draft angles (not shown):

THEORETICAL FLAT AREA
DEVELOPED FLAT AREA
GENERAL TOLERANCES
ANGLES
LENGTHS AND DIAMETERS

MATERIAL	–
TREATMENT	–
WEIGHT	–
DESIGN OWNER	MO
DRN	S. Ahl
CHD	–
APPR	–
DATE	01-01-27
MODEL	–
DESIGN USERS	– – MO –
SCALE	–
REPLACES No	–
DERIVED FROM No	–
SUPPLY SPECIFICATIONS No	–
EUROPEAN METHOD	
TITLE	Wiring diagram
NUMBER	305 29 92 shl
REV	–

Electrolux

MO 010010sa

A2