
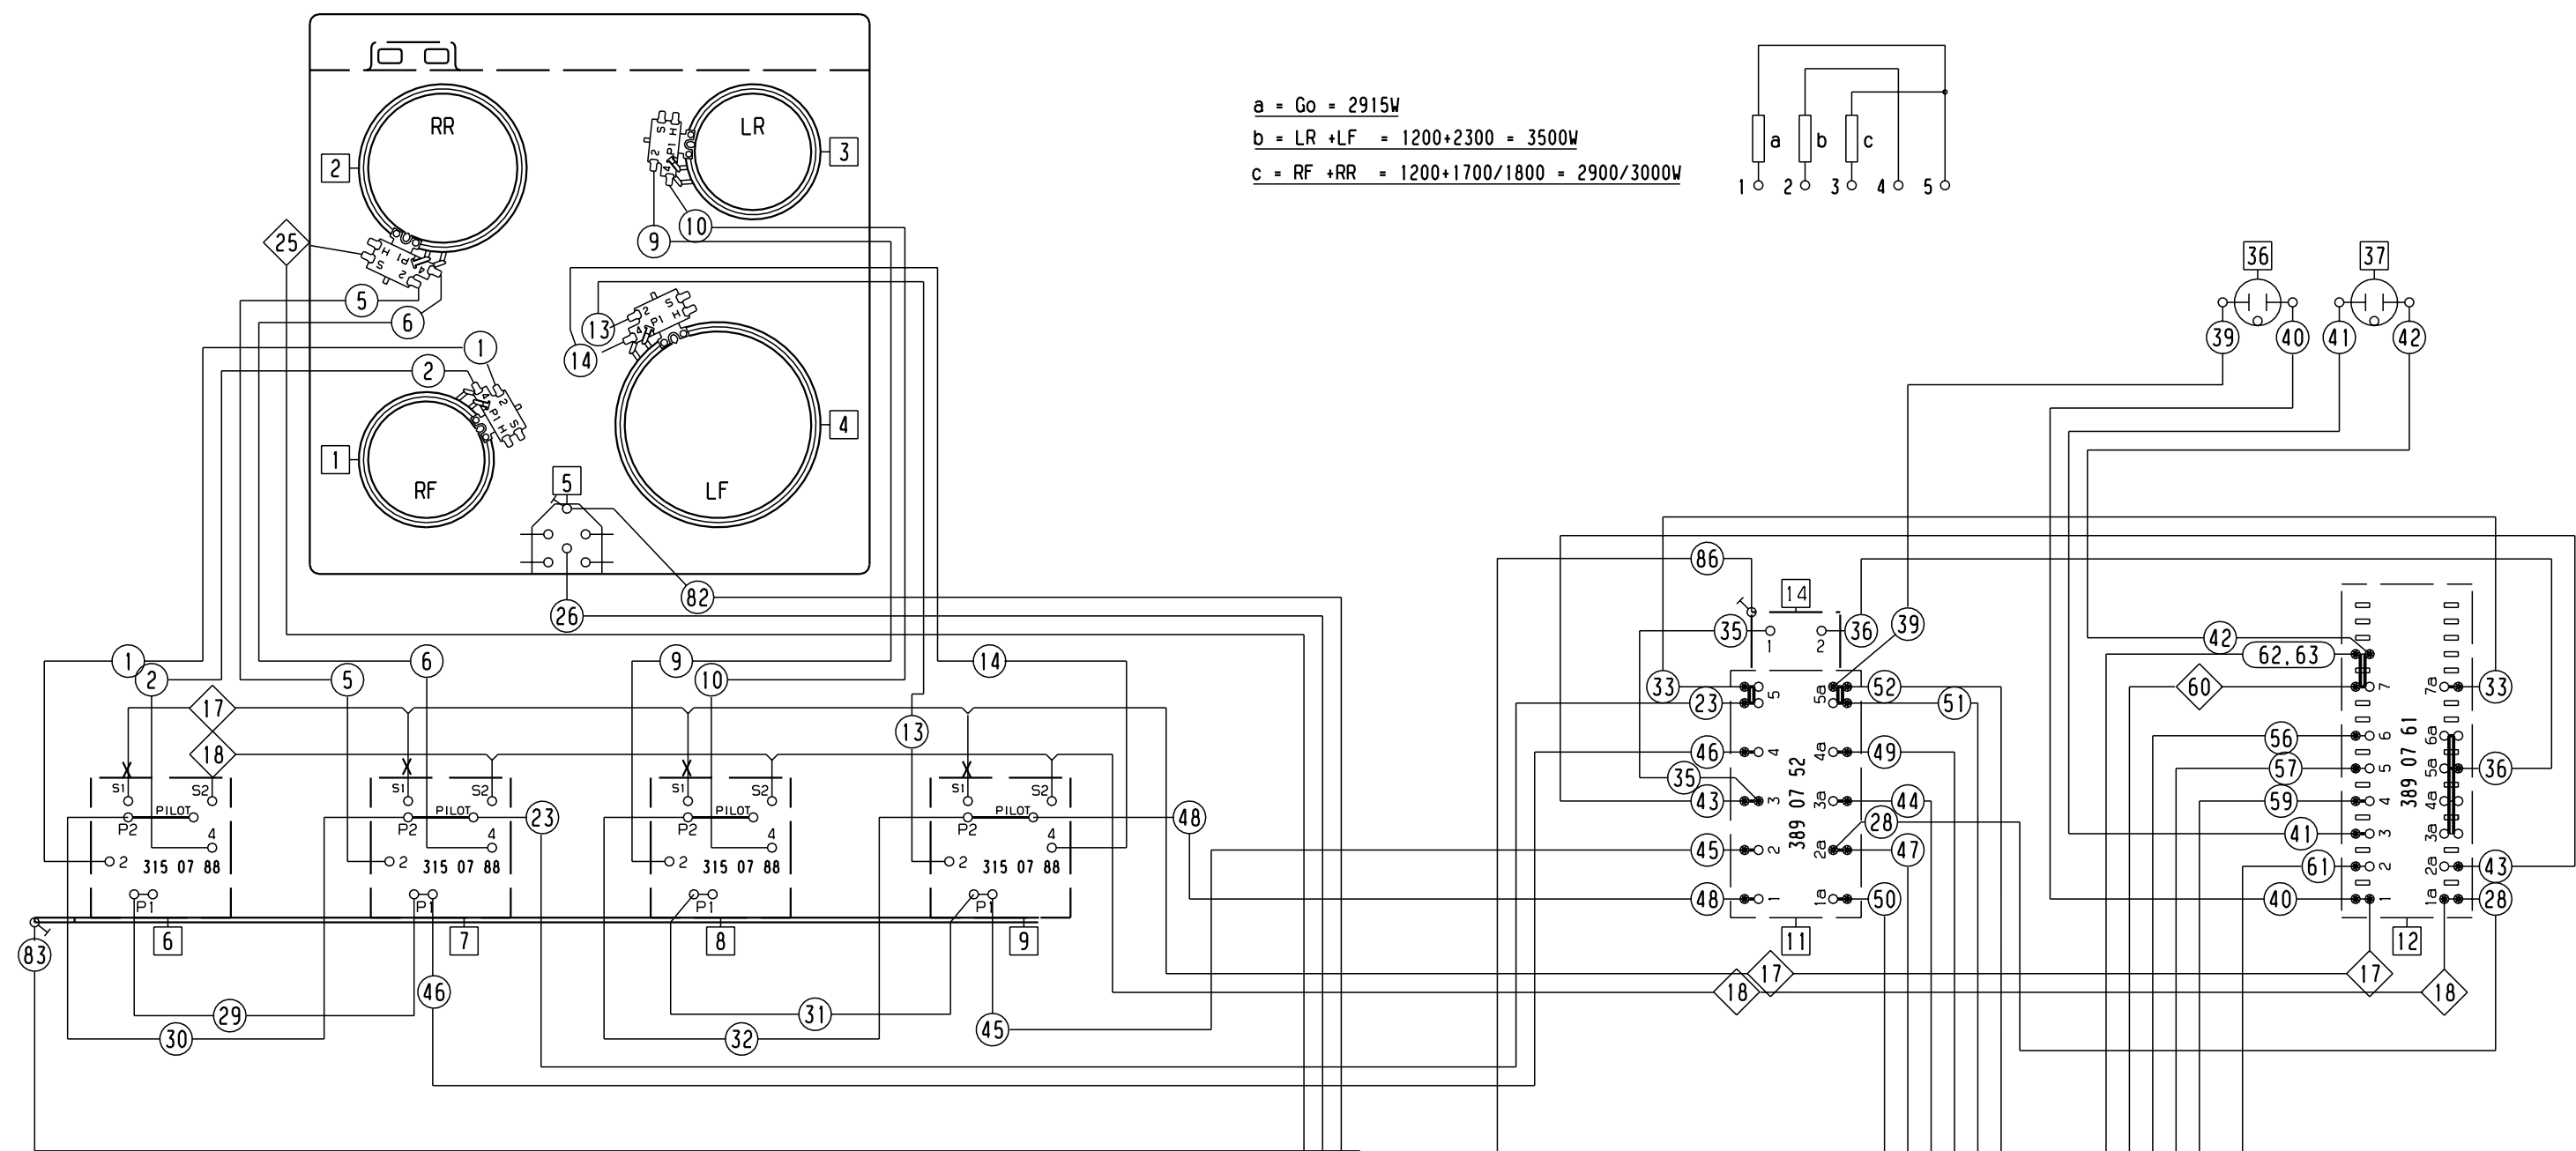


This drawing contains confidential information and is the property of Electrolux. It may not be copied, shown or handed to a third party or otherwise used, and it is to be returned promptly upon request to the person who issued it. The person who issues this drawing is responsible for the drawing.

a = Go = 2915W
 b = LR + LF = 1200+2300 = 3500W
 c = RF +RR = 1200+1700/1800 = 2900/3000W



Components =

1	R1	Radiant heater Ø140	1200W	24	-	-
2	R2	Radiant heater Ø180	1700/1800W	25	-	-
3	R3	Radiant heater Ø140	1200W	26	R13	Resistor 2k7 17W
4	R4	Radiant heater Ø220	2300W	27	-	-
5	E4	Heat indicator		28	-	-
6	O1	Energy regulator		29	-	-
7	O2	Energy regulator		30	-	-
8	O3	Energy regulator		31	R9	Element C.oven outer 1000W
9	O4	Energy regulator		32	R10	Element C.oven inner 1900W
10	-	-		33	-	-
11	S1	Safety switch		34	-	-
12	O5	Switch combi. oven		35	R12	Element C.oven under 1000W
13	O6	Switch Rapid oven		36	H1	Indicator lamp cooker
14	T1	Thermostat		37	H2	Indicator lamp oven
15	-	-		38	-	-
16	E1	Oven light 15W		39	-	-
17	-	-		40	-	-
18	-	-		41	-	-
19	-	-		42	-	-
20	-	-		43	-	-
21	T2	Bimetal thermostat		44	-	-
22	-	-		45	-	-
23	-	-		46	X1	Terminal block

[2] Critical dimensions which must be under capability
 SAFETY REQUIREMENT
 Visible surfaces.
 Draft angles (not shown):

MATERIAL	SCALE	EUROPEAN METHOD
TREATMENT	WEIGHT	REPLACES No
DESIGN OWNER DRN	DATE	DERIVED FROM No
MO	S. Ahl	SUPPLY SPECIFICATIONS No
TITLE		REV
Wiring diagram		A
NUMBER		
305 29 93 shl		

Electrolux

