



This drawing contains confidential information and is the property of Electrolux. It may not be copied, shown or handed to a third party or otherwise used, and it is to be returned promptly upon request to the person who issued it. The person who issues this drawing is responsible for the drawing.

$$a = G_u = 3350 + 15 + 10 = 3375W$$

$$b1 = R_F + L_F = 1200 + 2300 = 3500W$$

$$c1 = R_R + L_R = 2000 + 1700 = 3700W$$

$$c2 = R_R + L_R = 2000 + 1800 = 3800W$$

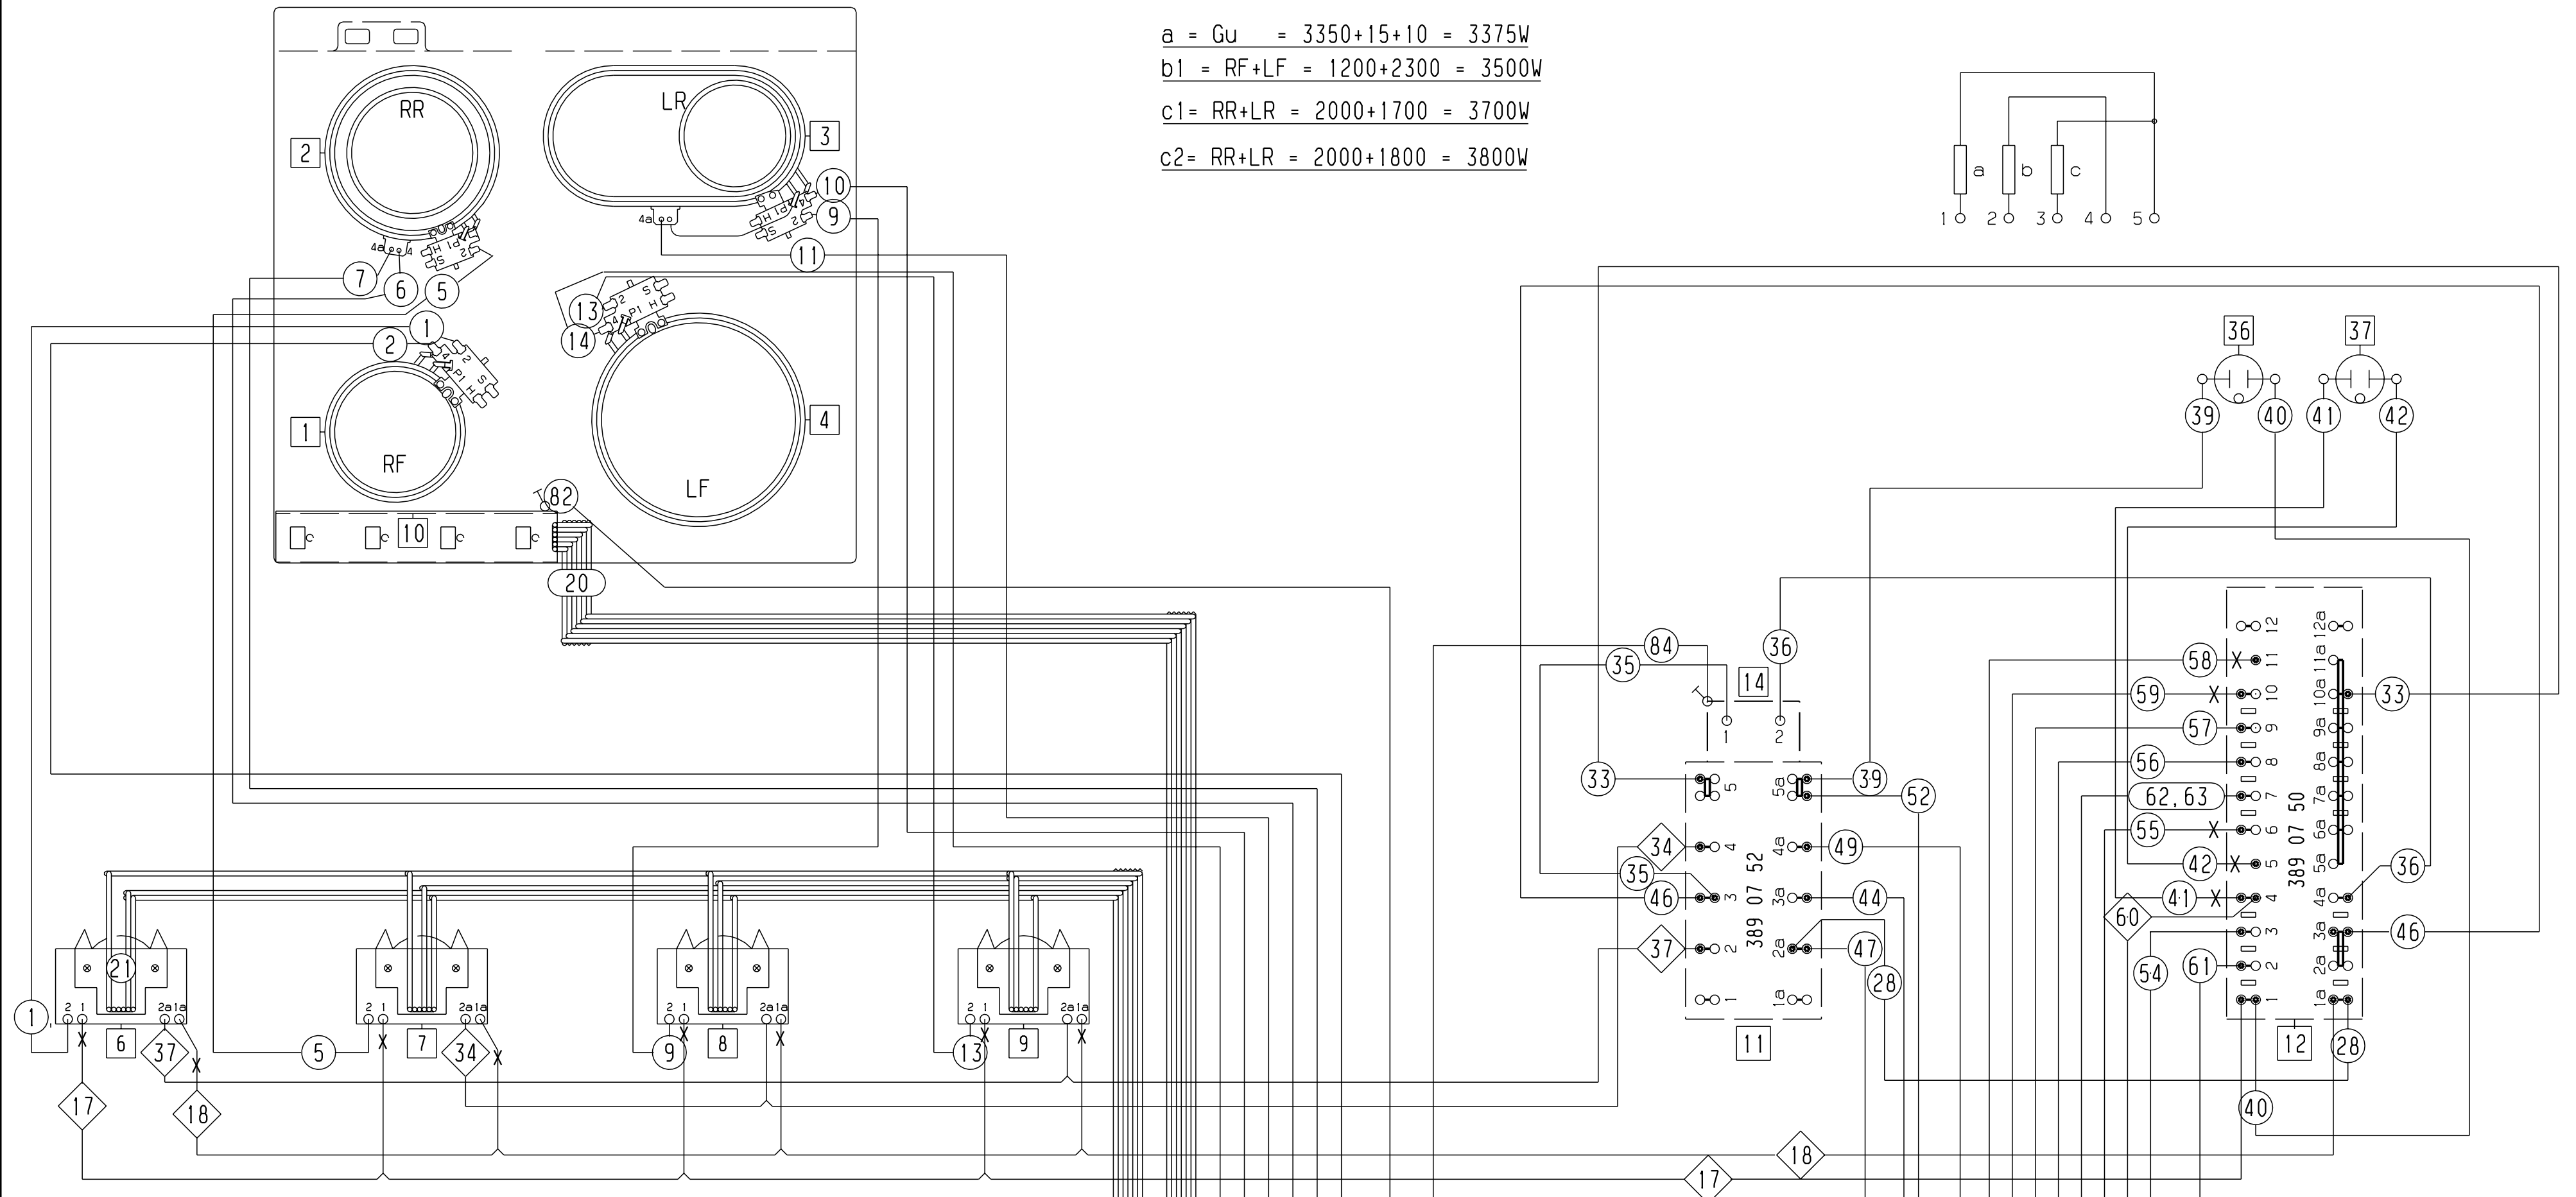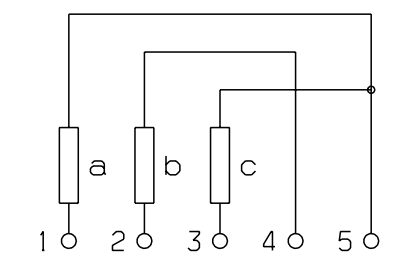

Components = □

1	R1	Hilight	Ø140	1200W	24	-	-
2	R2	Hilight	Ø120/180	700/1700W, 900/1800W	25	-	-
3	R3	Hilight	140/250	1100/2000W	26	R13	Power resistor
4	R4	Hilight	Ø 210	2300W	27	-	-
5	-	-	-	-	28	-	-
6	Q1	Input modul	E-zon	-	29	-	-
7	Q2	Input modul	D-zon	-	30	-	-
8	Q3	Input modul	D-zon	-	31	R9	Element C.oven outer 1000W
9	Q4	Input modul	E-zon	-	32	R10	Element C.oven grill 1900W
10	-	-	-	-	33	R11	Hot air heater 1350W
11	S1	Safety switch	-	-	34	M1	Hot air fan
12	O5	Switch	Combine oven	-	35	R12	Element C.oven lower 1000W
13	-	-	-	-	36	H1	Indicator lamp cooker
14	T1	Thermostat	-	-	37	H2	Indicator lamp oven
15	-	-	-	-	38	-	-
16	E1	Oven lamp	15W	C.oven	39	H5	Display Chec
17	-	-	-	-	40	-	-
18	-	-	-	-	41	A2	Power board elektronik
19	-	-	-	-	42	-	-
20	-	-	-	-	43	-	-
21	T2	Bimetal thermostat	-	-	44	-	-
22	-	-	-	-	45	-	-
23	-	-	-	-	46	X1	Terminal block

From: tillv.135. ska restvärmen indikeras även om funktionsbrytare står i "offläge".

MATERIAL	MODEL	SCALE	EUROPEAN METHOD
TREATMENT	WEIGHT	DESIGN USERS	REPLACES No
DESIGN OWNER	DRN	MO	DERIVED FROM No
MO	S. Ahl	DATE	SUPPLY SPECIFICATIONS No
CHD	APPR	01-03-01	TITLE
Wiring diagram			
NUMBER			REV
305 29 95 sh1			C



[2] Critical dimensions which must be under capability SAFETY REQUIREMENT Visible surfaces (not shown): Draft angles (not shown):

H  
G  
F  
E  
D  
C  
B  
A