


This drawing contains confidential information and is the property of Electrolux. It may not be copied, shown or handed to a third party or otherwise used, and it is to be returned promptly upon request to the drafter, which is responsible for the drawing.

[2] Critical dimensions which must be under capability
 SAFETY REQUIREMENT
 Visible surfaces.
 Draft angles (not shown):

THEORETICAL FLAT AREA
 DEVELOPED FLAT AREA
 GENERAL TOLERANCES
 ANGLES
 LENGTHS AND DIAMETERS

Components =

1	R1	Hot plate	Ø145	1500W	24	-	-
2	R2	Hot plate	Ø180	1500W	25	-	-
3	R3	Hot plate	Ø145	1000W	26	R13	Resistor 1k6 25W
4	R4	Hot plate	Ø220	2000W	27	-	-
5	-	-	-	-	28	-	-
6	O1	Hot plate switch	-	-	29	-	-
7	O2	Hot plate switch	-	-	30	-	-
8	O3	Hot plate switch	-	-	31	R9	Element C. oven outer 1000W
9	O4	Hot plate switch	-	-	32	R10	Element C. oven inner 1900W
10	T2	Thermostat	-	-	33	-	-
11	S1	Safety switch	-	-	34	-	-
12	O5	Switch combi. oven	-	-	35	R12	Element C. oven under 1000W
13	-	-	-	-	36	H1	Indicator lamp cooker
14	T1	Thermostat	-	-	37	H2	Indicator lamp oven
15	-	-	-	-	38	-	-
16	E1	Oven light	25W	-	39	-	-
17	-	-	-	-	40	-	-
18	-	-	-	-	41	-	-
19	-	-	-	-	42	-	-
20	-	-	-	-	43	-	-
21	T3	Bimetal thermostat	-	-	44	-	-
22	-	-	-	-	45	-	-
23	-	-	-	-	46	X1	Terminal block

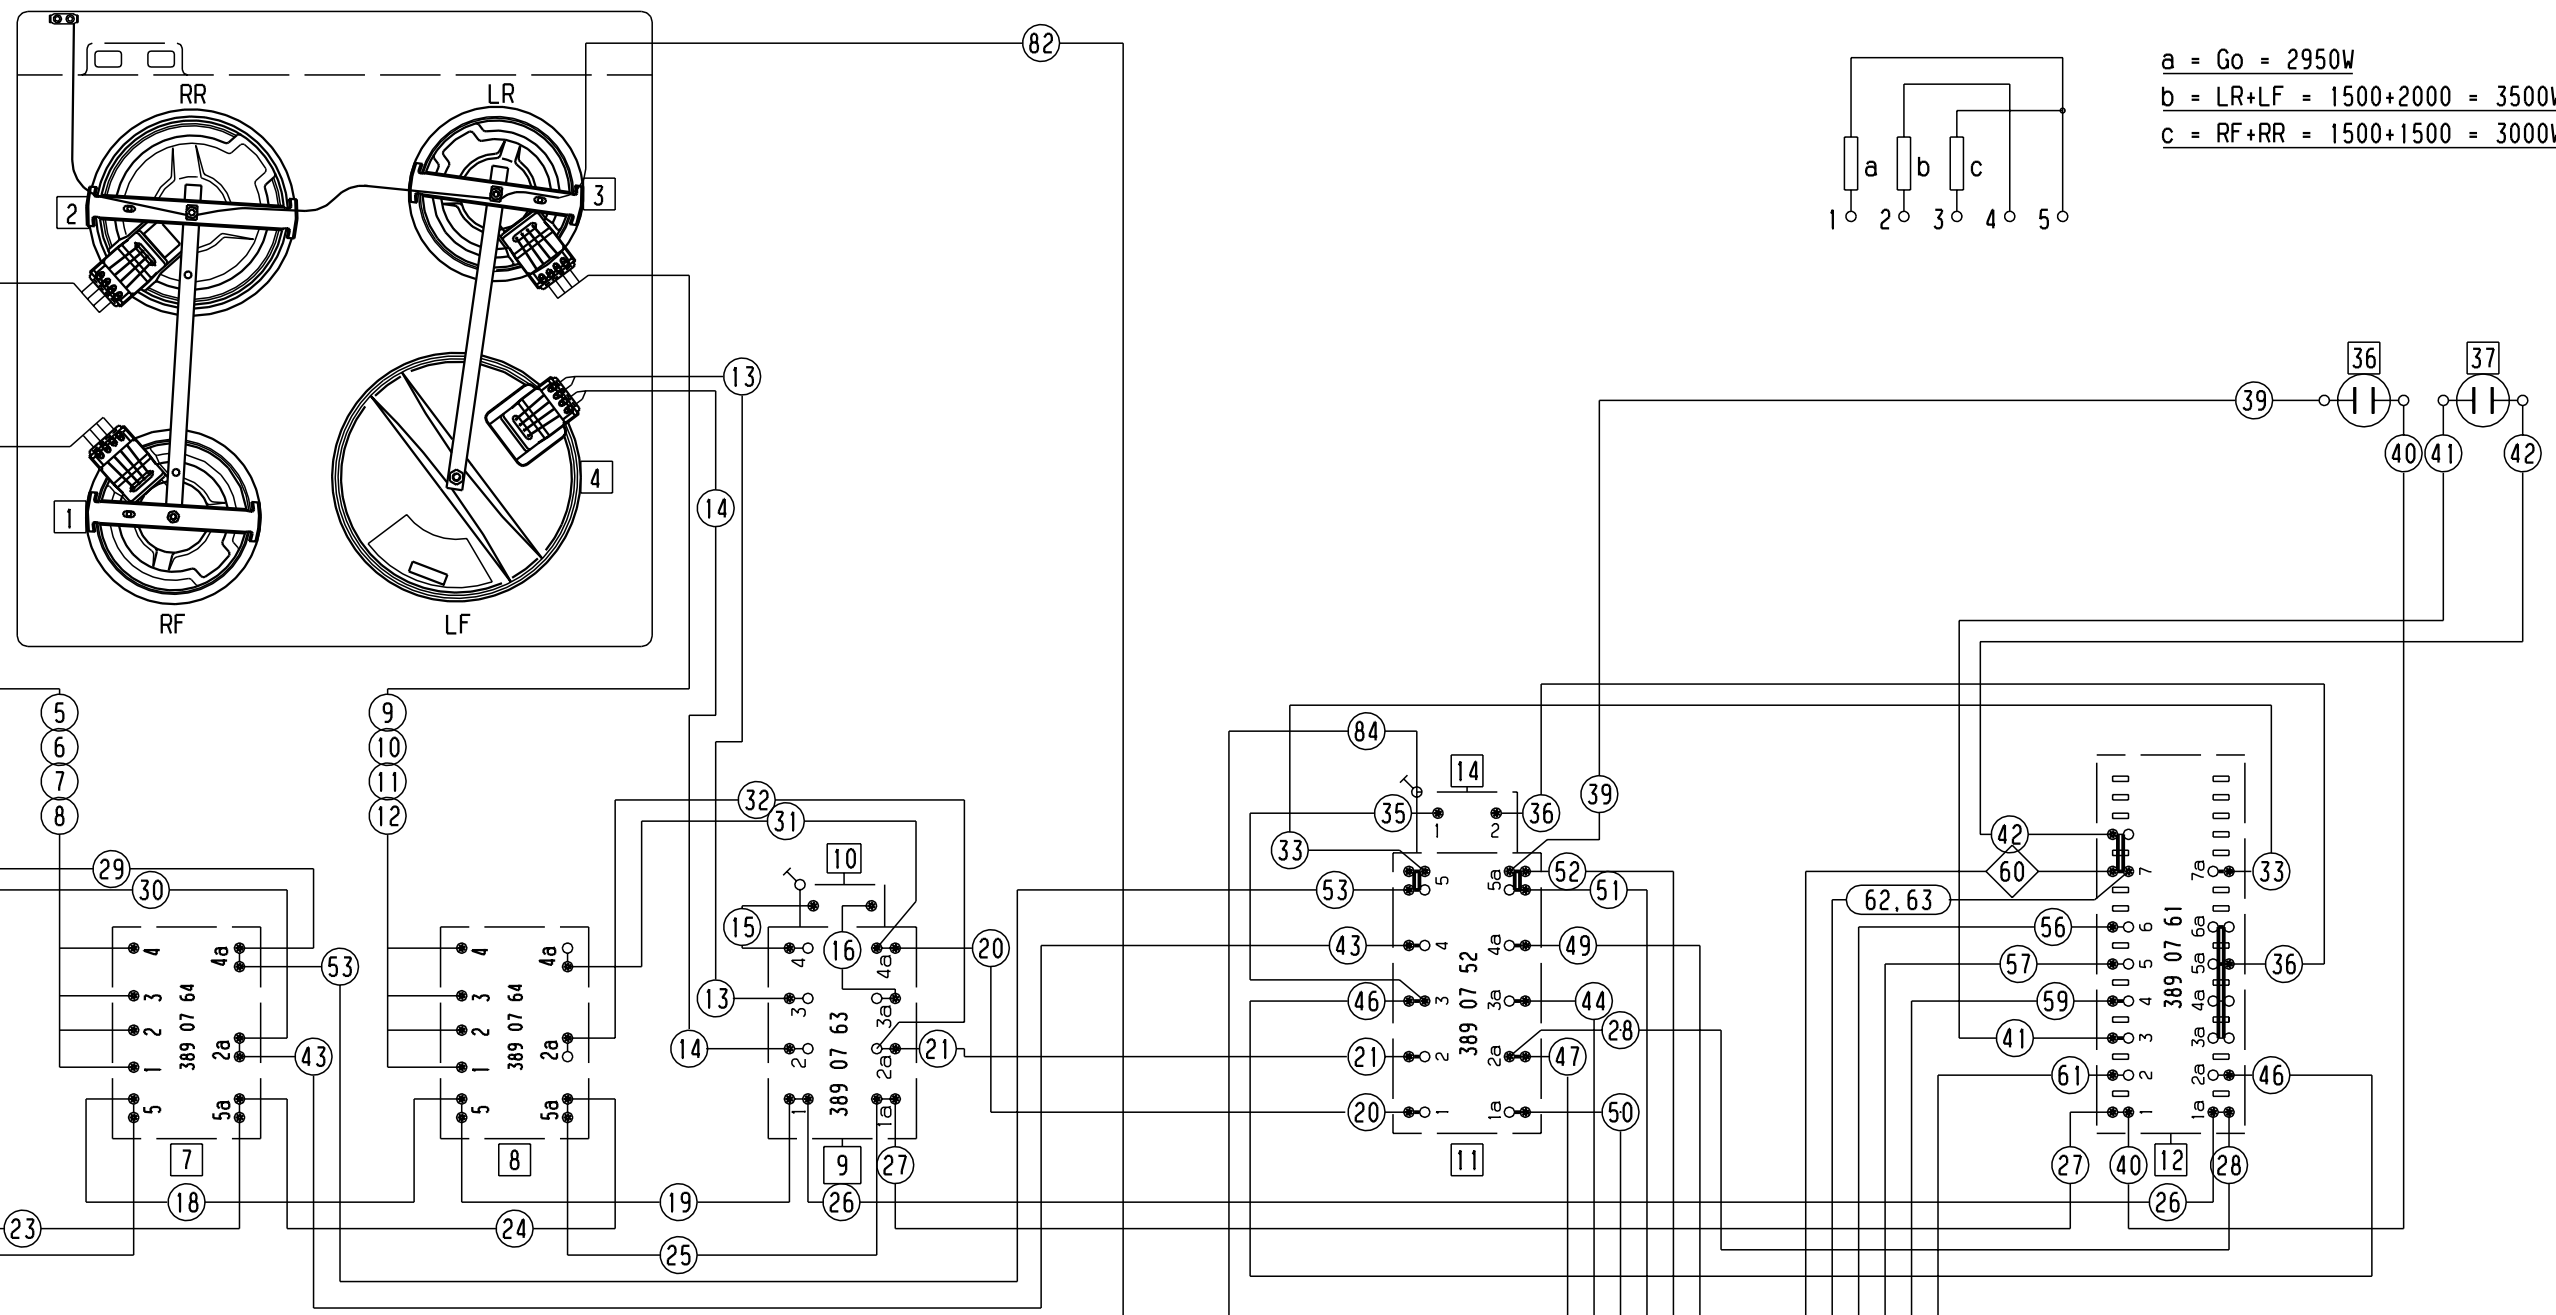

$$a = G_0 = 2950W$$

$$b = LR+LF = 1500+2000 = 3500W$$

$$c = RF+RR = 1500+1500 = 3000W$$

MATERIAL	MODEL	SCALE	EUROPEAN METHOD
TREATMENT	DESIGN USERS	REPLACES	
DESIGN OWNER	MO	DERIVED FROM	
DRN	IAN	SUPPLY SPECIFICATIONS	
CHD	DATE	TITLE	Wiring diagram
APPR	01-04-27	NUMBER	305 29 99 shi
		REV	-