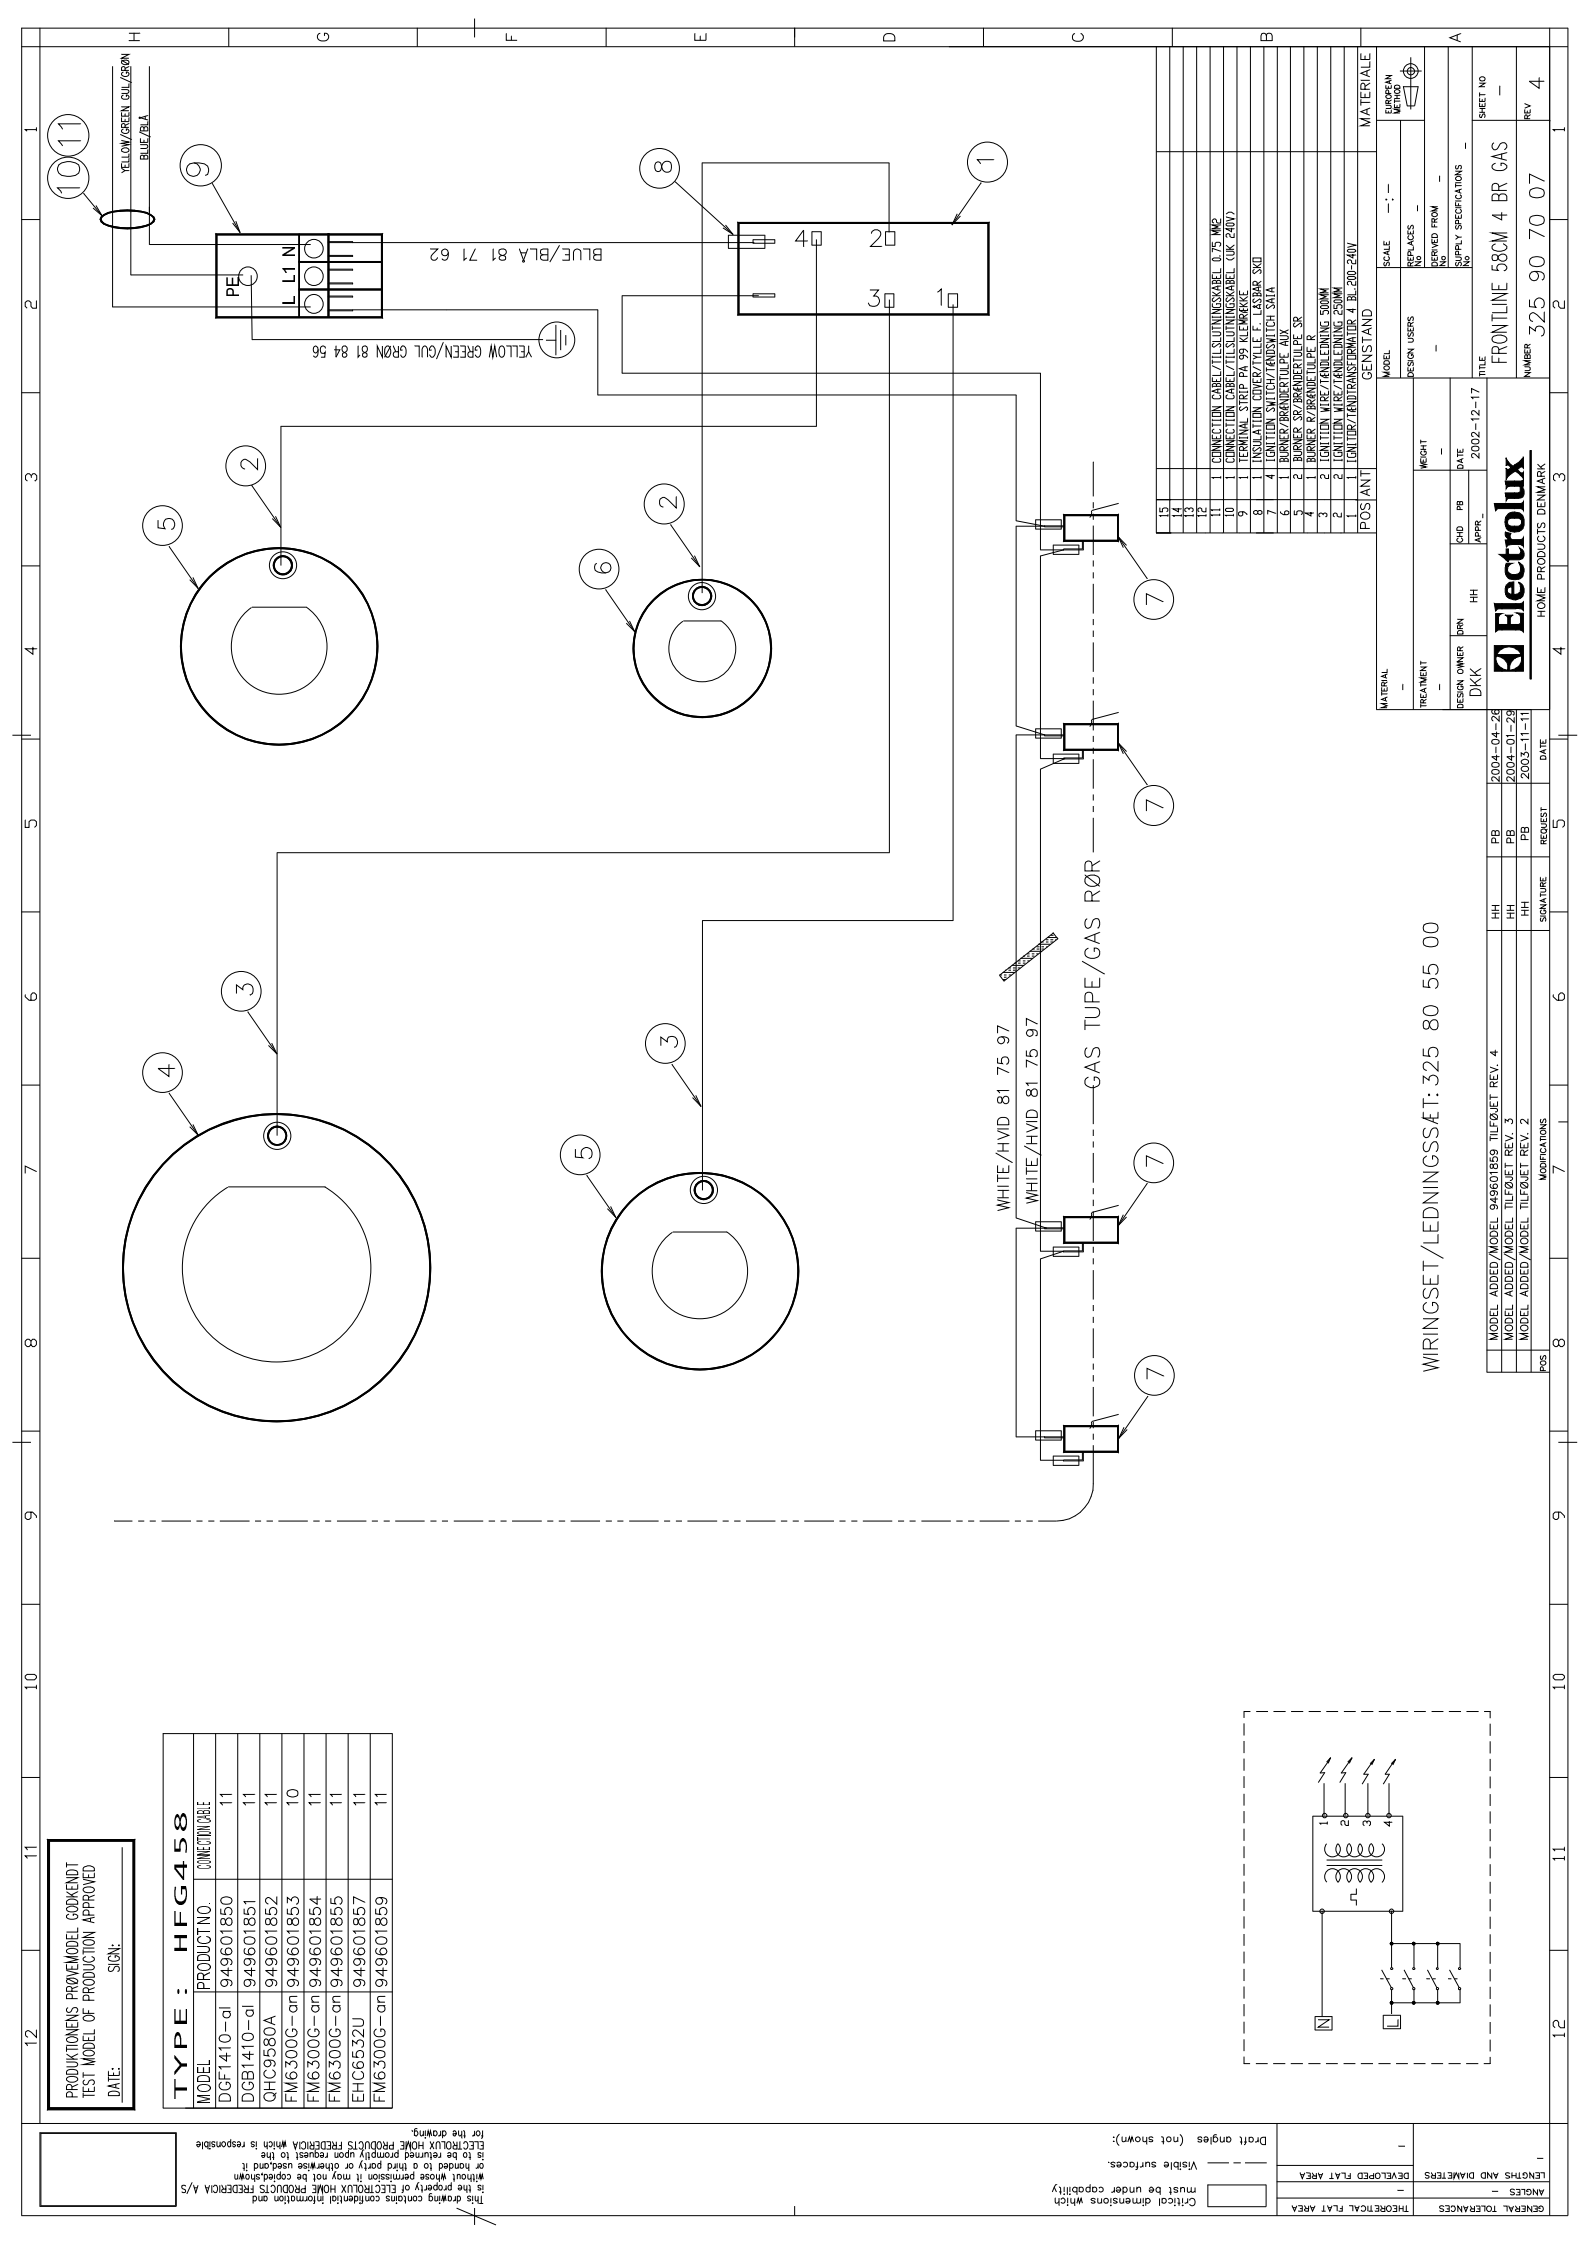

POS	ANT	MATERIALE
15		
14		
13		
12		
11	1	CONNECTION CABEL/TILSLUTNINGSKABEL 0.75 MM2
10	1	CONNECTION CABEL/TILSLUTNINGSKABEL (UK 240V)
9	1	TERMINAL STRIP PA 99 KLEMRÆKKE
8	1	INSULATION COVER/TYLLE F. LÅSTAAR SKD
7	4	IGNITION SWITCH/TÆNDSWITCH SAIA
6	1	BURNER/BRÆNDERTULPE AUX
5	2	BURNER SR/BRÆNDERTULPE SR
4	1	BURNER R/BRÆNDERTULPE R
3	2	IGNITION WIRE/TÆNDLEDNING 500MM
2	2	IGNITION WIRE/TÆNDLEDNING 250MM
1	1	IGNITOR/TÆNDTRANSFORMATOR 4 BL-200-240V
		GENSTAND

MATERIAL	–				
TREATMENT	–	WEIGHT	–	CHD PB	DATE 2002-12-17
DESIGN OWNER	DKK	DRN HH		APPR.	

MODEL	SCALE –:–	EUROPEAN METHOD
DESIGN USERS –	REPLACES No –	
	DERIVED FROM No –	
	SUPPLY SPECIFICATIONS No –	

Electrolux
HOME PRODUCTS DENMARK

TITLE	SHEET NO
FRONTLINE 58CM 4 BR GAS	–
NUMBER 325 90 70 07	REV 4

POS	MODIFICATIONS	SIGNATURE	REQUEST	DATE
	MODEL ADDED/MODEL 949601859 TILFØJET REV. 4	HH	PB	2004-04-26
	MODEL ADDED/MODEL TILFØJET REV. 3	HH	PB	2004-01-29
	MODEL ADDED/MODEL TILFØJET REV. 2	HH	PB	2003-11-11

TYPE : HFG458		
MODEL	PRODUCT NO.	CONNECTION CABLE
DGF1410-al	949601850	11
DGB1410-al	949601851	11
QHC9580A	949601852	11
FM6300G-an	949601853	10
FM6300G-an	949601854	11
FM6300G-an	949601855	11
EHC6532U	949601857	11
FM6300G-an	949601859	11

PRODUKTIONENS PRØVEMODEL GODKENDT
TEST MODEL OF PRODUCTION APPROVED
DATE: SIGN:

GENERAL TOLERANCES
ANGLES –
LENGTHS AND DIAMETERS
THEORETICAL FLAT AREA
DEVELOPED FLAT AREA

Critical dimensions which must be under capability
Visible surfaces.
Draft angles (not shown):

This drawing contains confidential information and is the property of ELECTROLUX HOME PRODUCTS FREDERICIA A/S or handed to a third party or otherwise used,and it is to be returned promptly upon request to the ELECTROLUX HOME PRODUCTS FREDERICIA which is responsible for the drawing, without whose permission it may not be copied,shown