


OUTDOOR UNIT WIRING DIAGRAM

0010534175

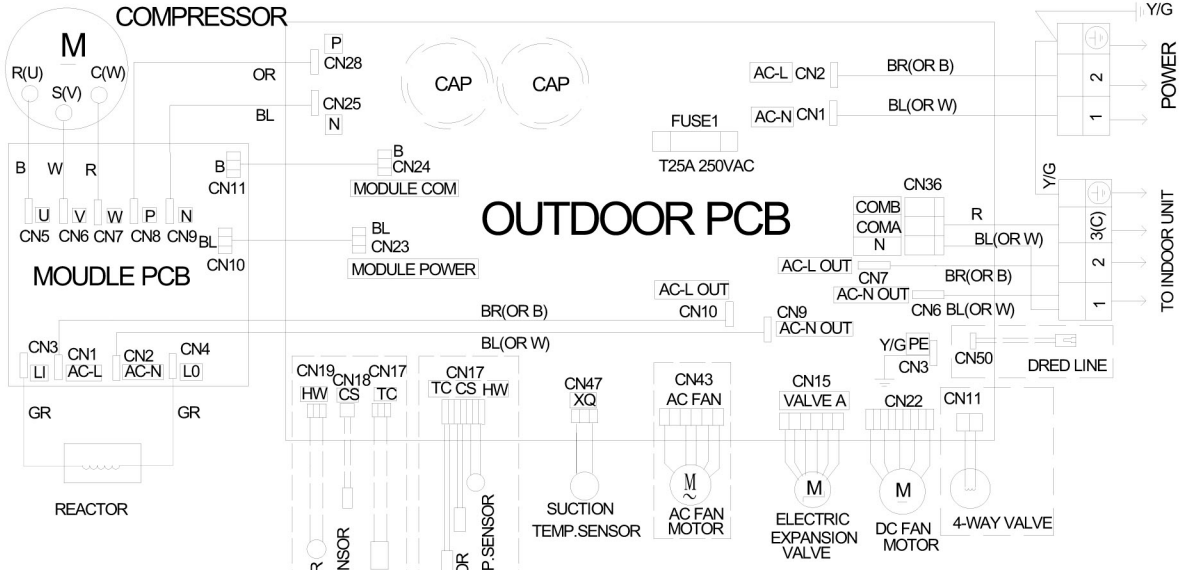

Note: The dotted parts are optional.
 The @1 and the @2 cannot exist at the time,
 but must keep one of them.

B: Black W: White
 R: Red Y/G: Yellow/Green
 BR: Brown OR: Orange
 BL: Blue GR: Gray

WARNING CAUTION

DON'T TOUCH CAPACITOR, EVEN AFTER PLUG-OFF (DANGER OF ELECTRIC SHOCK)!

THE CAPACITOR RETAINS HIGH VOLTAGE EVEN AFTER THE PLUG-OFF. FOR YOUR SAFETY, BE SURE TO WAIT AT LEAST 5 MINUTES AFTER PLUG OFF AND USE A TESTER TO CONFIRM THE VOLTAGE BETWEEN CONNECTOR CN25 AND CN28(ON MAIN PCB BOARD) IS LESS THAN DC 10V BEFORE START SERVICING OR LED2 EXTINGUISHED.