This drawing contains confidential information and is the property of Electrolux, without whose permission it may not be copied, shown or handed to a third party or otherwise used and it is to be returned promptly upon request to the design owner, who is responsible for the drawing.

Items shown in this drawing must not contain substances that are banned according to Directive, 2002/95/EC, the RoHS Directive (Lead, Cadmium, Mercury, hexavalent Chromium, PBB and PBDE), or substances classified as "Banned" or "Restricted" according to the Electrolux Restricted Materials List.

USER INTERFACE

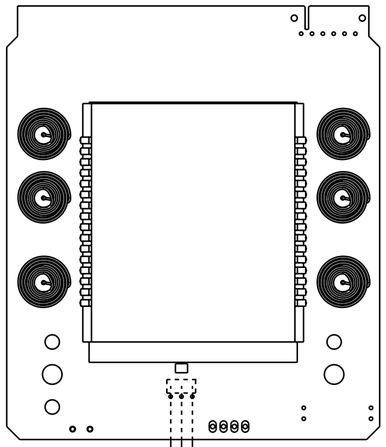

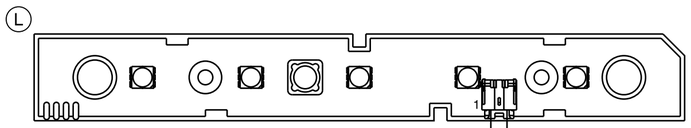

brown
yellow
F
F
brown
blue



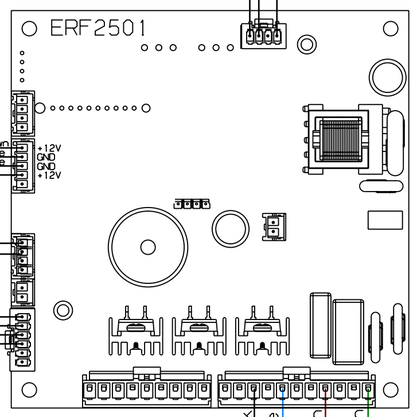

FZ
Door Swtich
F

REF air sensor
NTC
F

REF evap sensor
NTC
F
black marking

black
grey alt.blue
brown
yellow/green
F

grey alt.blue
brown
yellow/green

blue
brown
yellow/green

NEUTRAL
LIVE
EARTH
LINE

ACC

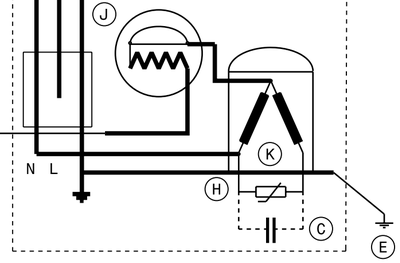

black

E

(K) COMPRESSOR
(H) STARTING DEVICE
(C) RUN CAPACITOR
(F) FLEXIBLE CORD
(E) EARTH CABINET
(J) MOTOR PROTECTOR
(G) 12V DME FAN
(L) 12V LED LAMP

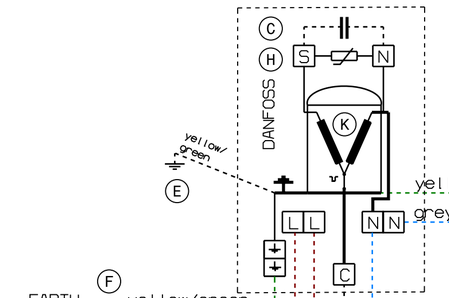

yellow/green
grey alt.blue

F
EARTH
LIVE
NEUTRAL
LINE
yellow/green
brown
blue

black
brown

A	TM 10426: New drawing	CF		2010-07-01
POS.	MODIFICATIONS	SIGNATURE	REQUEST	DATE

MATERIAL
TREATMENT
WEIGHT
MODEL
DESIGN USERS
SCALE
REPLACES
DERIVED FROM
SUPPLY SPECIFICATIONS
EUROPEAN METHOD

DESIGN OWNER: ABF
DRN: CF
DATE: 2010-07-01
CHD
APPR
2D ONLY: X
CONCEPT 3D
EXACT 3D

TITLE: Wiring Diagram
Kopplingsschema

NUMBER: 208 8888
REV: A
SHEET: 1/1

208 8888-00
Variant No.

Electrolux

GENERAL TOLERANCES
ANGLES
LENGTHS AND DIAMETERS

A2 [DF04]