


Dimensions, data and characteristics, which are subjected to Statistic Process Control (SPC) are marked with

This drawing contains confidential information and is the property of Electrolux, without whose permission it may not be reproduced, stored in a retrieval system or otherwise used and it is to be returned promptly upon request to the design owner, who is responsible for the drawing.

Components reflected by this drawing must not contain substances or coatings of any of the substances banned according to Dir. 2002/95/EC, RoHS, or substances on the REACH candidate list published on <http://echa.europa.eu/>. They have to conform in all respects with Electrolux "Restricted Materials List" as published on www.electrolux.com. Upon request documentation demonstrating compliance with these requirements shall be immediately provided by the supplier to Electrolux.

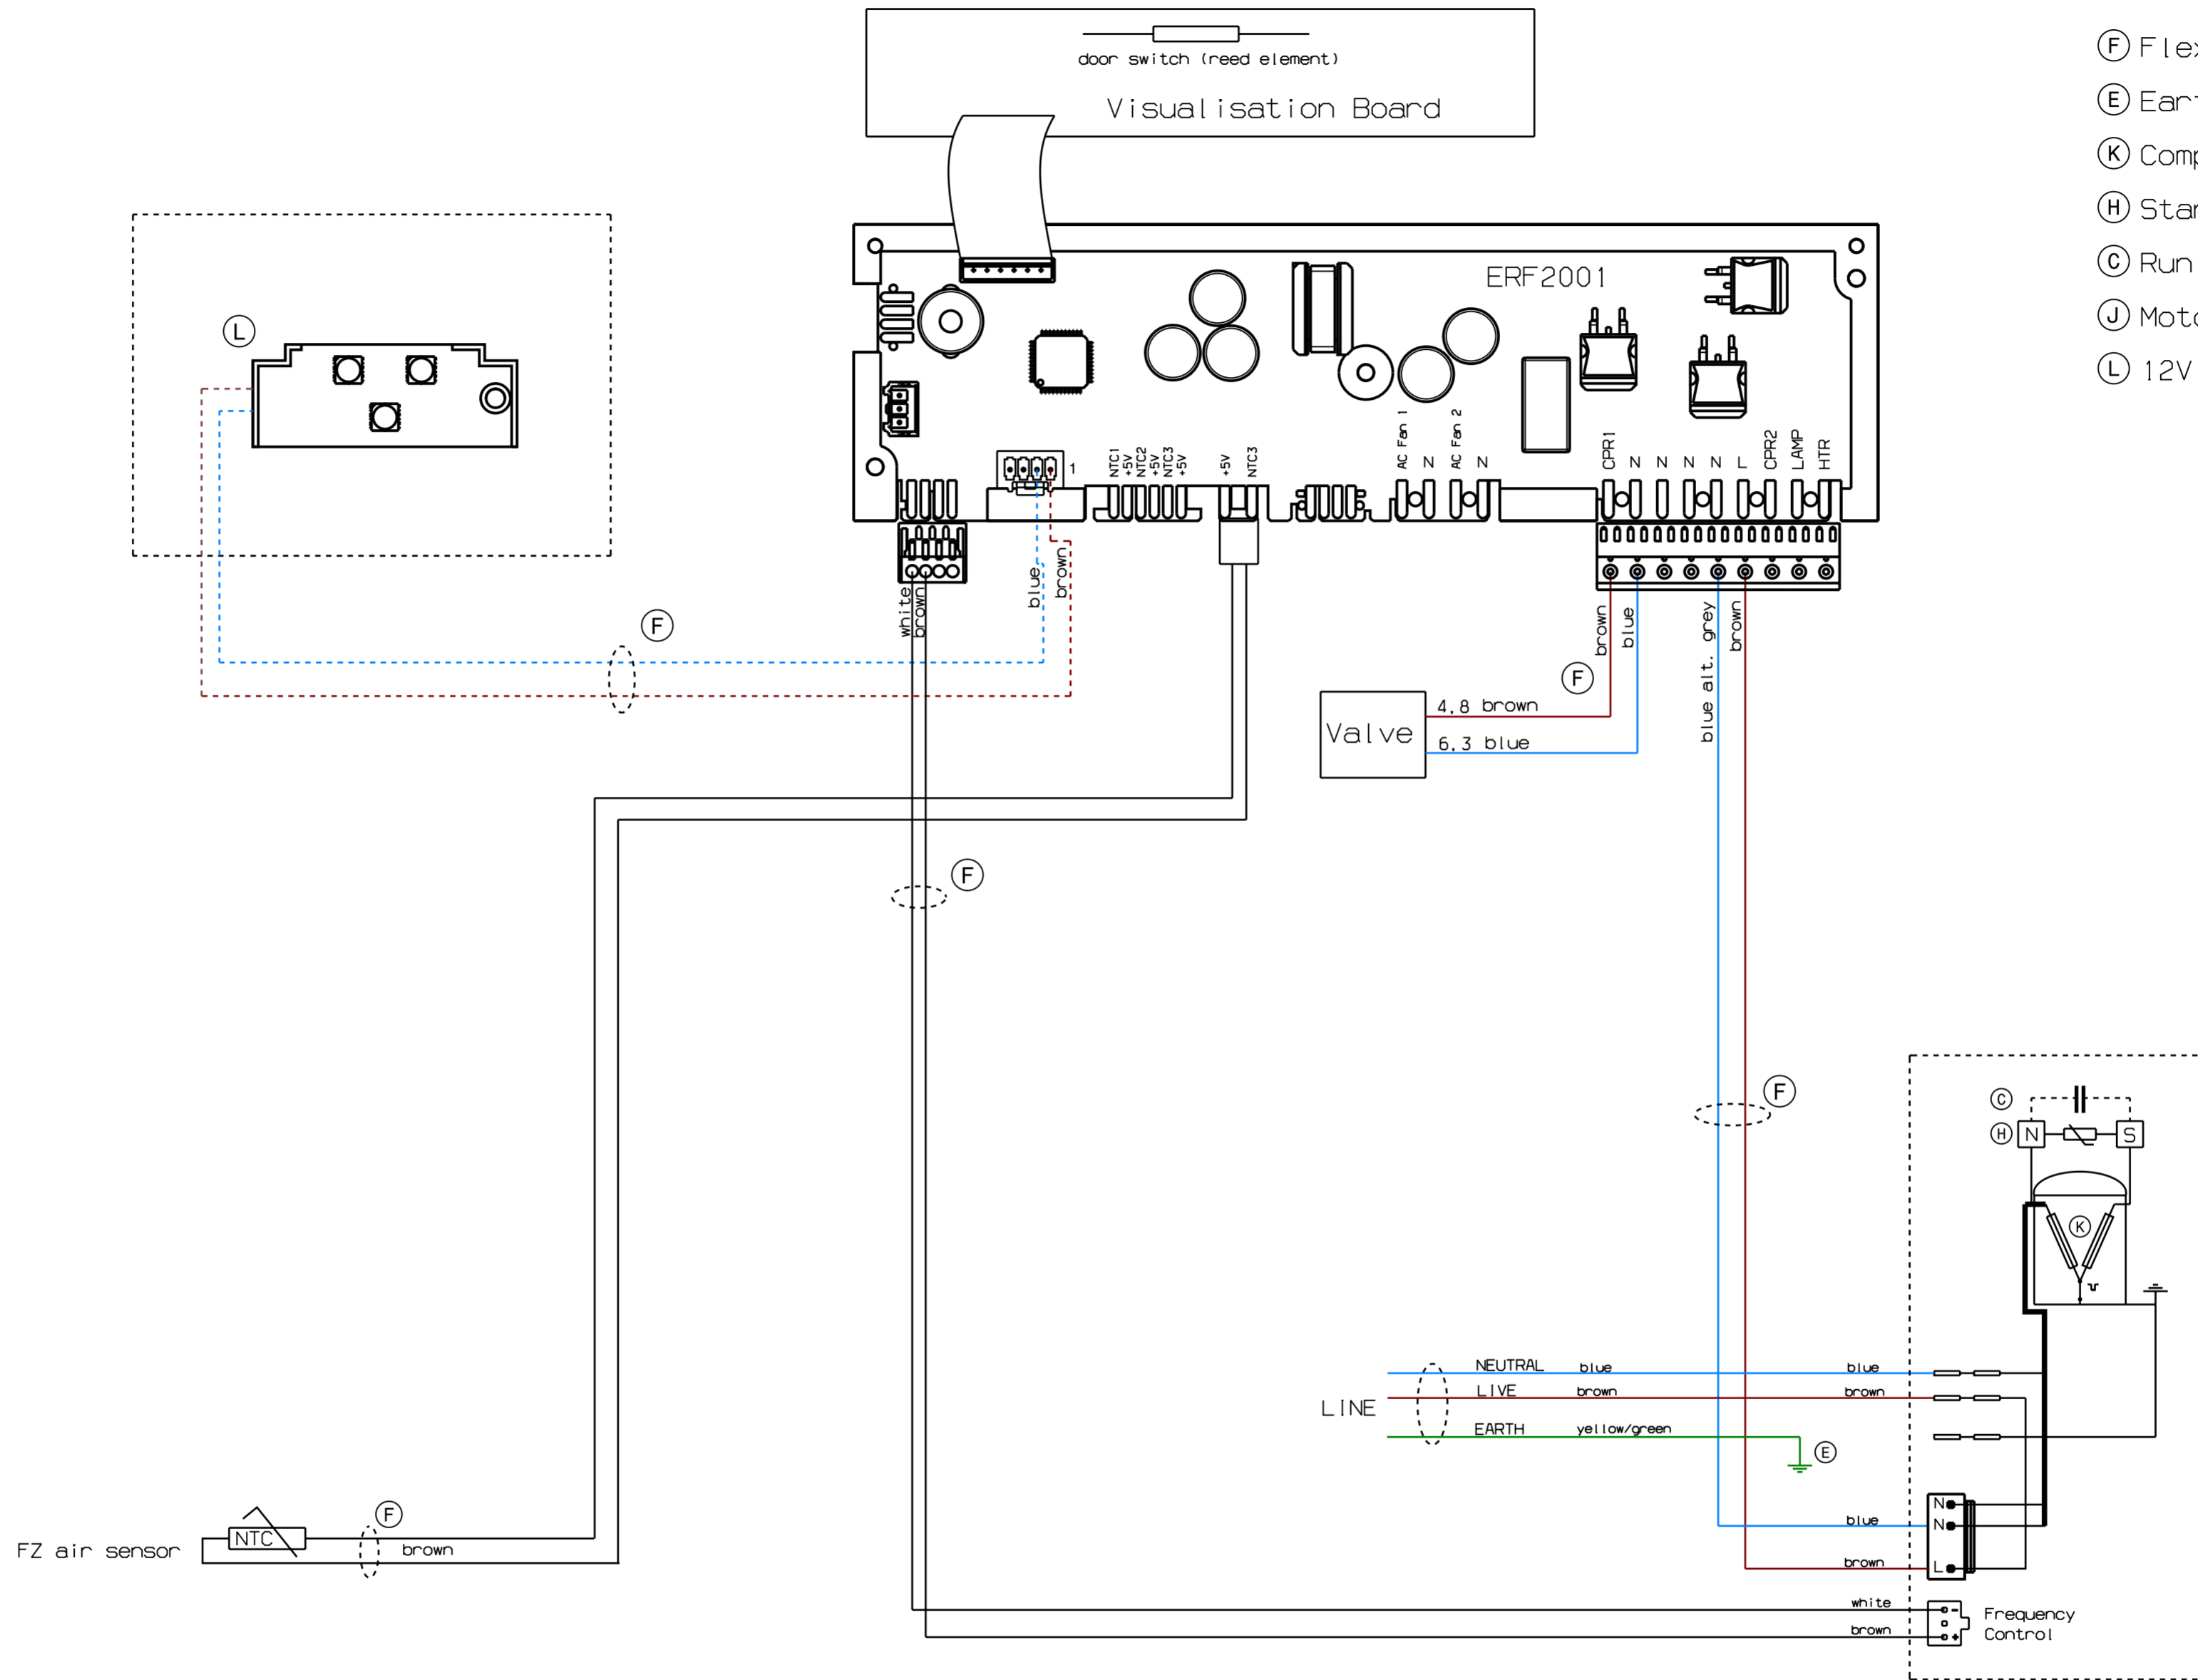

- (F) Flexible Cord
- (E) Earth Cabinet
- (K) Compressor
- (H) Starting Device
- (C) Run Capacitor
- (J) Motor Protector
- (L) 12V LED Light

GENERAL TOLERANCES
 ANGLES AND DIAMETERS
 ISO 2768-m

Any approved discrepancy will be documented in the Inspection report.
 Eventuella godkända avvikelser dokumenteras i Kontrollrapporten.

243 4047-00
 VARIANT NUMBER

A TM 12328, Introduction.				FJK	ABF	2012-06-18
POS. MODIFICATIONS				SIGNATURE	REQUEST	DATE
MATERIAL			MODEL	SCALE		EUROPEAN METHOD
TREATMENT			DESIGN USERS	REPLACES		
			ABF	DERIVED FROM		
DESIGN OWNER	DRN	FJK	CHD	2D ONLY	X	
ABF	DATE 2012-06-18	APPR	EXACT 3D			
TITLE				Wiring, Diagram		
				Kopplingschema		
NUMBER				REV		A
243 4047				SHEET		1/1

