

THERMOSTAT BOX REMOVAL, HOOK BROKEN

DESCRIPTION:


During detachment of thermostat box, fixing hook (A) may break. It happens mostly in older devices where cabinet's plastic innerliner is less flexible.



PROBLEM SOLUTION

It is recommended to put screwdriver in hole (1) in order to fold back a hook and then move thermostat box towards back of appliance (2).

If the hook was broken, box can be attached by screw using hole (3). It is important that screw's thread is almost 16x3,5mm.

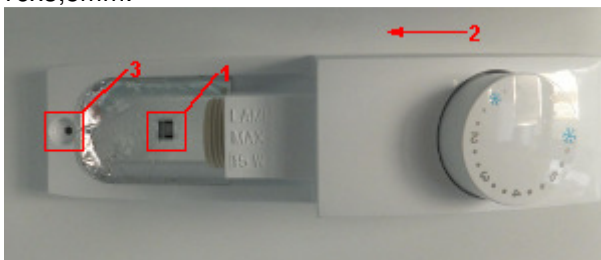

SPARE PARTS

229000405/6 – screw 3,5x15,5mm

REVISION

revision	Date	Description	Autor	Approved by – date
00	03 / 2013	Document Creation	K.L.	