
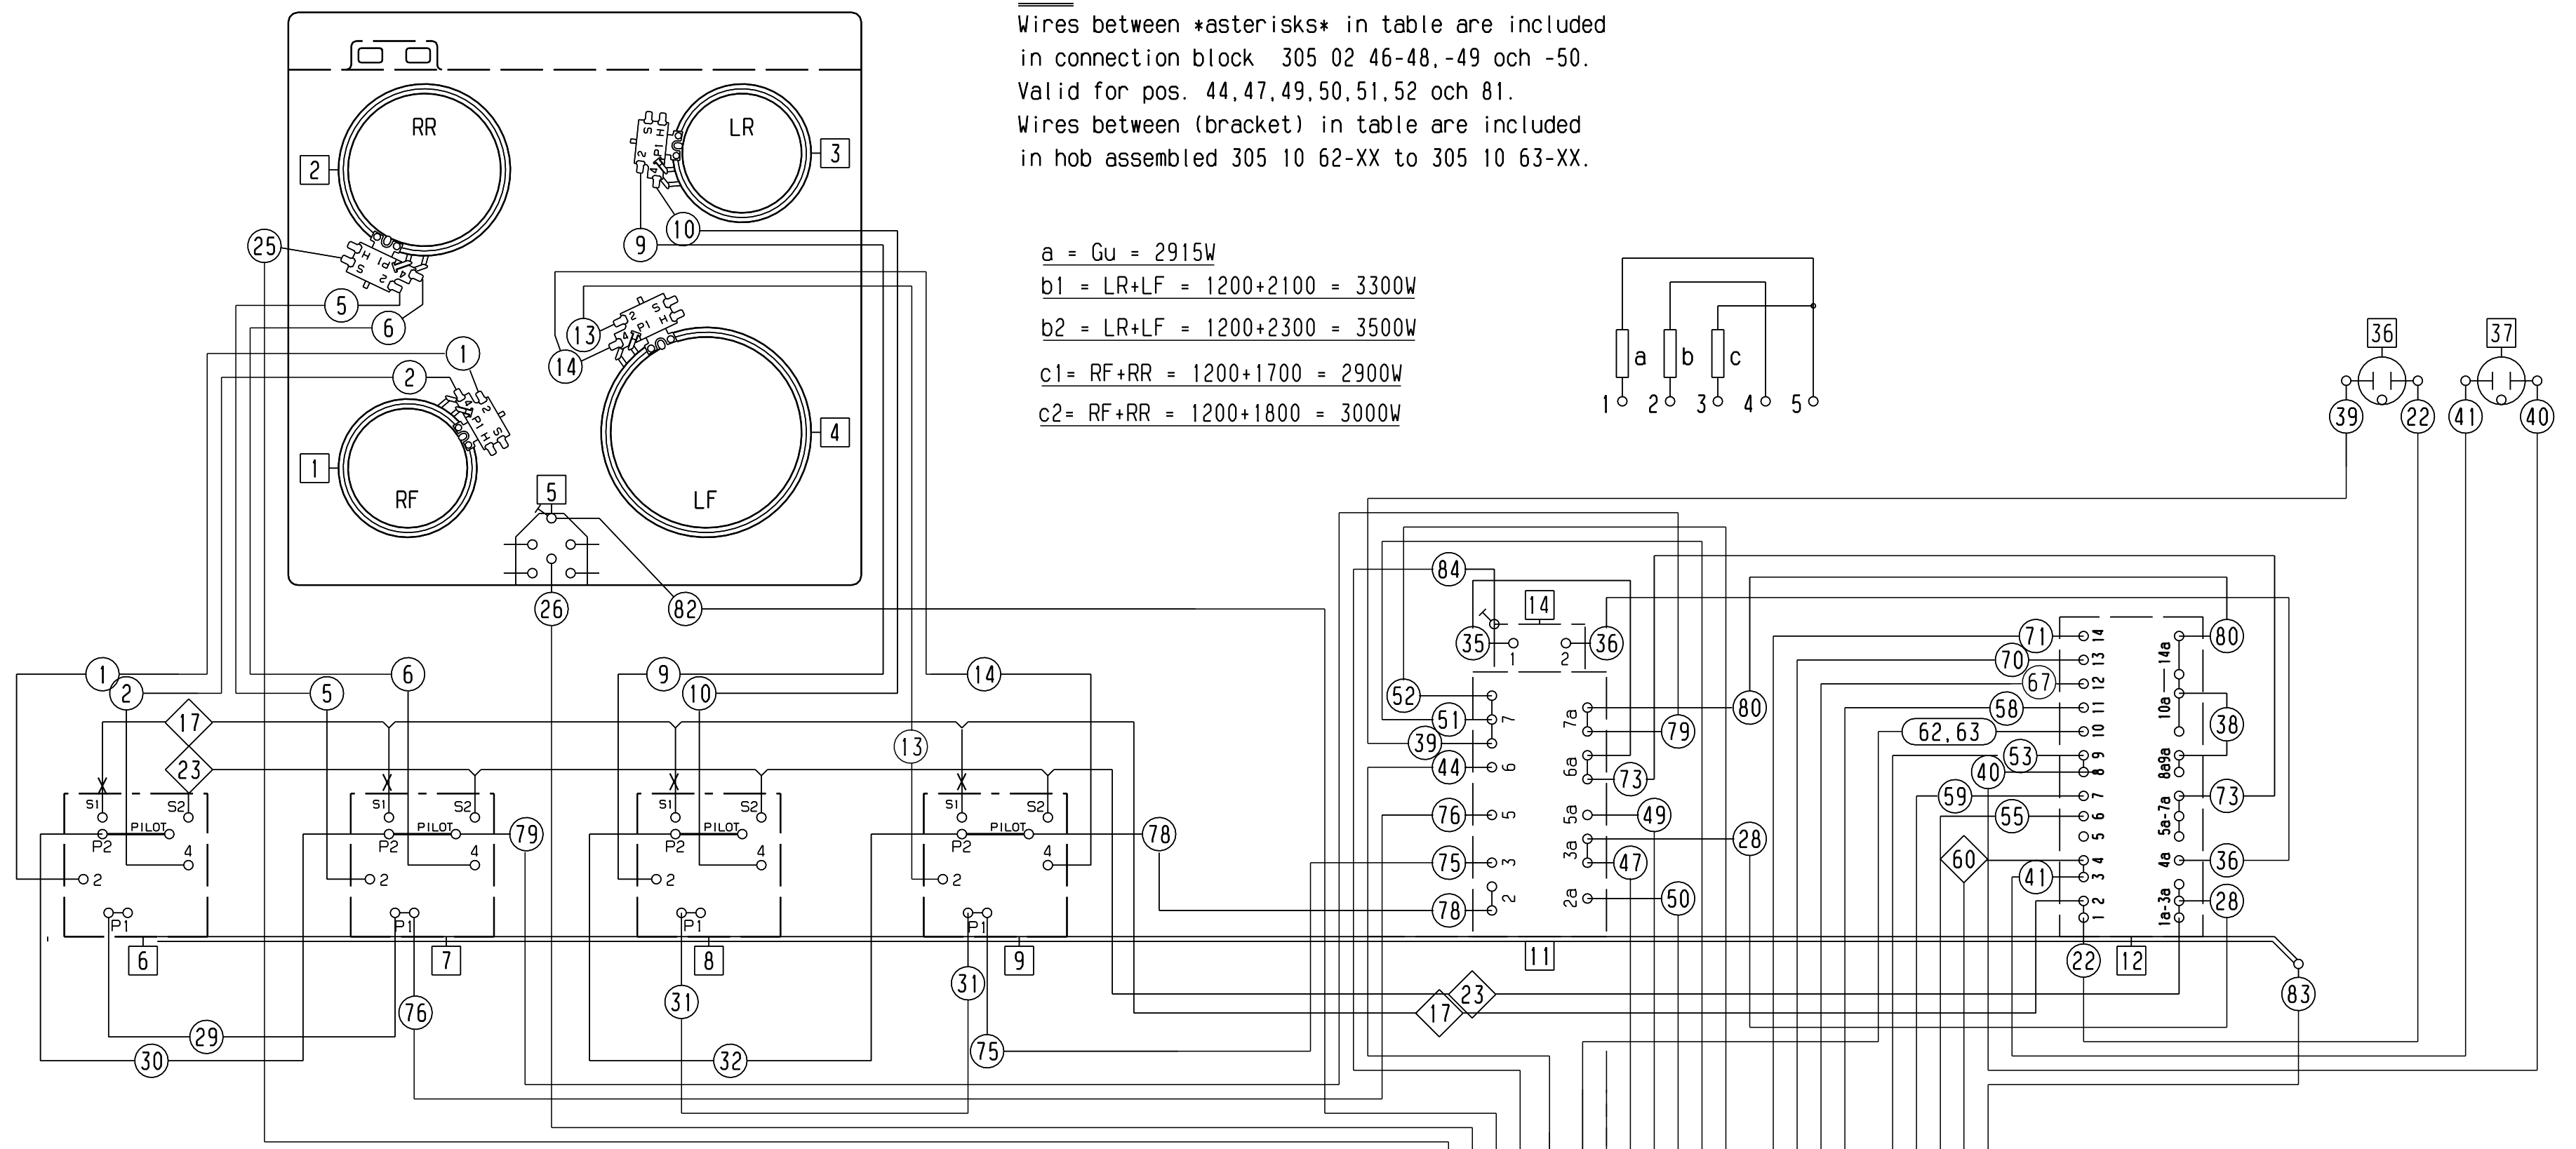


This drawing contains confidential information and is the property of Electrolux. It may not be copied, shown or handed to a third party or otherwise used, and it is to be returned promptly upon request to the person who issued it. The person who is responsible for the drawing.

[2] Critical dimensions which must be under capability
 SAFETY REQUIREMENT
 Draft angles (not shown):
 Visible surfaces:
 THEORETICAL FLAT AREA
 DEVELOPED FLAT AREA
 GENERAL TOLERANCES
 ANGLES
 LENGTHS AND DIAMETERS


Not.
 Wires between *asterisks* in table are included in connection block 305 02 46-48, -49 och -50.
 Valid for pos. 44,47,49,50,51,52 och 81.
 Wires between (bracket) in table are included in hob assembled 305 10 62-XX to 305 10 63-XX.

$a = G_u = 2915W$
 $b1 = LR+LF = 1200+2100 = 3300W$
 $b2 = LR+LF = 1200+2300 = 3500W$
 $c1 = RF+RR = 1200+1700 = 2900W$
 $c2 = RF+RR = 1200+1800 = 3000W$

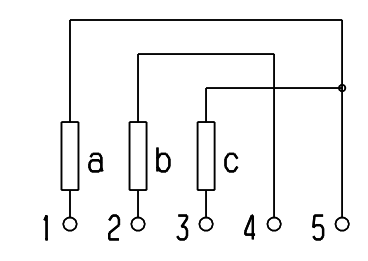

Components =

1	R1	Radiant heater Ø140 1200W	24	-	-
2	R2	Radiant heater Ø180 1700W/1800W	25	-	-
3	R3	Radiant heater Ø140 1200W	26	R13	Power resistor 2k7 17W
4	R4	Radiant heater Ø210 2100W/2300W	27	-	-
5	H4	Residual heat indc. 3051621	28	-	-
6	Q1	Energy regulator	29	-	-
7	Q2	Energy regulator	30	-	-
8	Q3	Energy regulator	31	R9	Element G. oven outer 1000W
9	Q4	Energy regulator	32	R10	Element G. oven grill 1900W
10	-	-	33	R11	Hot air element 1350W
11	S1	Safety switch Cooker	34	M1	Hot air fan
12	Q5	Switch oven	35	R12	Element G. oven under 1000W
13	-	-	36	H1	Indicator lamp cooker
14	T1	Thermostat oven	37	H2	Indicator lamp oven
15	-	-	38	-	-
16	E1	Oven lamp 15W G. oven	39	-	-
17	-	-	40	-	-
18	-	-	41	-	-
19	-	-	42	-	-
20	-	-	43	-	-
21	-	-	44	-	-
22	-	-	45	-	-
23	-	-	46	X1	Terminal block

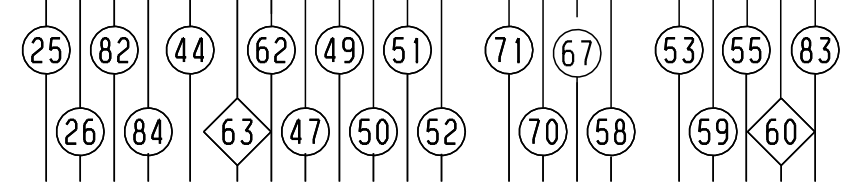

MATERIAL	DESIGN OWNERS	SCALE	EUROPEAN METHOD
TREATMENT	REPLACES NO	WEIGHT	
DESIGN OWNER DRN	DERIVED FROM NO	DATE	
MO IAN	SUPPLY SPECIFICATIONS NO	99-03-18	
TITLE Wiring diagram			
NUMBER 305 29 53 sh1 REV A			

Electrolux